


Portable System Owners Manual



Adult Assembly Required.

This manual, accompanied by sales receipt, should be saved and kept on hand as a convenient reference, as it contains important information about your model.

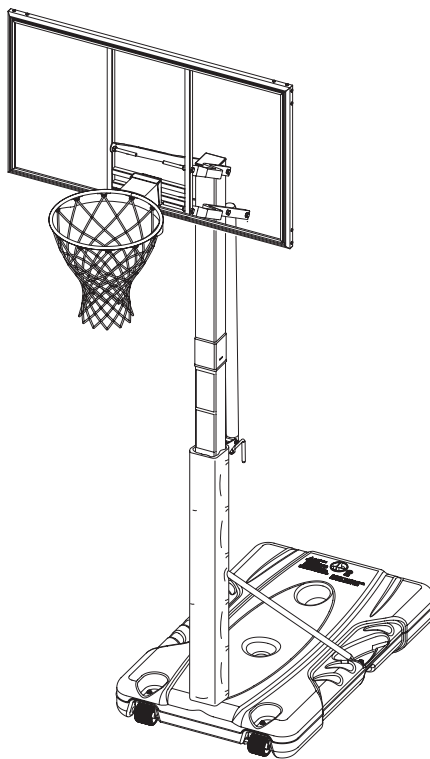

WARNING!

READ AND UNDERSTAND
OPERATOR'S MANUAL
BEFORE USING THIS UNIT.



FAILURE TO
FOLLOW OPERATING
INSTRUCTIONS COULD
RESULT IN INJURY OR
DAMAGE TO PROPERTY.

Write Model Number
From Box Here:

REQUIRED TOOLS AND MATERIALS:



• 2 Capable Adults



• Tape Measure



• Wood Board (scrap)



• Sawhorse or Support
Table



• Hammer or Mallet




• Step Ladder 8 ft. (2.4m)



• Safety Glasses

• (2 each) Wrenches



AND/OR

(2) Socket Wrenches and Sockets




• Extension




• Phillips-Head Screwdriver



• Garden Hose or Sand



• Optional: Large & Small
Adjustable Wrenches



Toll-Free Customer Service Number for U.S: 1-800-558-5234, For Canada: 1-800-284-8339





For Europe: +353 51 379777, For Australia: 1300 367 582

Internet Address: www.spalding.com www.spalding.com.au

BEFORE YOU START

To ensure optimal playability of backboard system, a close tolerance fit between the elevator components and hardware is required. Test-fit large bolts into large holes of elevator tubes, backboard brackets, and triangle plates. Carefully rock them in a circular motion to ream out any excess paint from holes if necessary.


NOTE: Not all items pictured are included with every model.

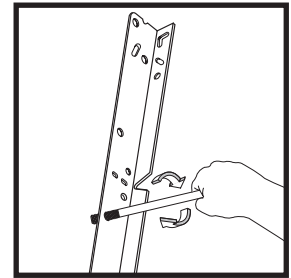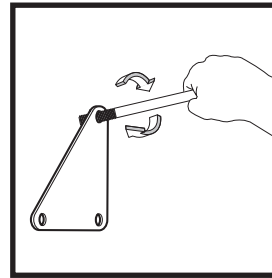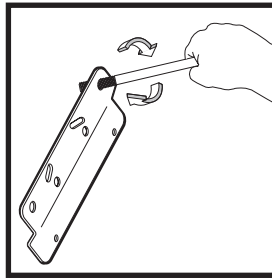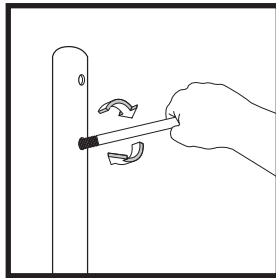

HEIGHT ADJUSTMENT

Rotate crank handle to raise and lower backboard.


Do not over crank handle beyond the manufactured height indicator range of 7-1/2 - 10 feet. Damage may be caused to the screw jack's internal adjustment mechanism if adjusted over 10 or under 7-1/2 feet.

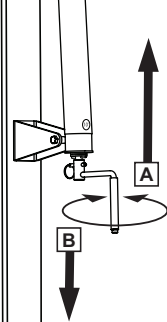

33

MOVING SYSTEM

1. While holding pole, rotate basketball system forward until wheels engage with ground.
2. Move basketball system to desired location.
3. Carefully rotate basketball system upright.
4. Check system for stability.

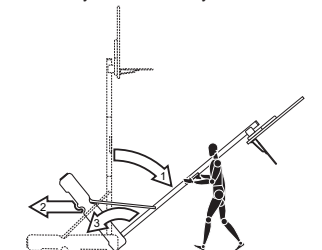

568090 11/06

WARNING

Read and understand warnings listed below before using this product.

Failure to follow these warnings may result in serious injury and/or property damage.

Owner must ensure that all players know and follow these rules for safe operation of the system.

- DO NOT HANG on the rim or any part of the system including backboard, support braces or net.
- During play, especially when performing dunk type activities, keep player's face away from the backboard, rim and net. Serious injury could occur if teeth/faces come in contact with backboard, rim or net.
- Do not slide, climb, shake or play on base and/or pole.
- After assembly is complete, fill system completely with water or sand and stake to the ground. Never leave system in an upright position without filling base with weight, as system may tip over causing injuries.
- When adjusting height or moving system, keep hands and fingers away from moving parts.
- Do not allow children to move or adjust system.
- During play, do not wear jewelry (rings, watches, necklaces, etc.). Objects may entangle in net.
- Surface beneath the base must be smooth and free of gravel or other sharp objects. Punctures cause leakage and could cause system to tip over.
- Keep organic material away from pole base. Grass, litter, etc. could cause corrosion and/or deterioration.
- Check pole system for signs of corrosion (rust, pitting, chipping) and repaint with exterior enamel paint. If rust has penetrated through the steel anywhere, replace pole immediately.
- Check system before each use for proper ballast, loose hardware, excessive wear and signs corrosion and repair before use.
- Check system before each use for instability.
- Do not use system during windy and/or severe weather conditions; system may tip over. Place system in the storage position and/or in an area protected from the wind and free from personal property and/or overhead wires.
- Never play on damaged equipment.
- See instruction manual for proper installation and maintenance.
- When moving system, use caution to keep mechanism from shifting.
- Keep pole top covered with cap at all times.
- Do not allow water in tank to freeze. During sub-freezing weather add 2 gallons of non-toxic antifreeze, sand or empty tank completely and store. (Do not use salt.)
- While moving system, do not allow anyone to stand or sit on base or have added ballasting on base.
- Do not leave system unsupervised or play on system when wheels are engaged for moving.
- Use Caution when moving system across uneven surfaces. System may tip over.
- Use extreme caution if placing system on sloped surface. System may tip over more easily.

SPALDING

In U.S. 1-800-284-6333
In Canada 1-800-284-6333
In Australia 1-800-284-6333

RUSSELL

Trademarks registered
in the USA and other countries.

HYDRA-RIB

In U.S. 1-800-284-6333
In Canada 1-800-284-6333

NOTICE TO ASSEMBLERS

Adult Assembly Required. Dispose of ALL packaging materials promptly. As with all products, periodically inspect for loose small parts.

Assembled unit MUST be filled with sand or water at ALL times.

ALL basketball systems, including those used for DISPLAYS, MUST be assembled and installed according to instructions. Failure to follow instructions could result in SERIOUS INJURY. It is NOT acceptable to devise a makeshift support system.



SAFETY INSTRUCTIONS




FAILURE TO FOLLOW THESE SAFETY INSTRUCTIONS MAY RESULT IN SERIOUS INJURY OR PROPERTY DAMAGE AND WILL VOID WARRANTY.

Owner must ensure that all players know and follow these rules for safe operation of the system.

To ensure safety, do not attempt to assemble this system without following the instructions carefully. Check entire box and inside all packing material for parts and/or additional instruction material. Before beginning assembly, read the instructions and identify parts using the hardware identifier and parts list in this document. Proper and complete assembly, use, and supervision are essential for proper operation and to reduce the risk of accident or injury. A high probability of serious injury exists if this system is not installed, maintained, and operated properly.

- If using a ladder during assembly, use extreme caution.
- Check base regularly for leakage. Slow leaks could cause the system to tip over unexpectedly
- Seat the pole sections properly (if applicable). Failure to do so could allow the pole sections to separate during play and/or during transport of the system.
- Climate, corrosion or misuse could result in system failure.
- If technical assistance is required, contact Customer Service.
- Minimum operational height is 6' 6" (1.98m) to the bottom of backboard.

*Most injuries are caused by misuse and/or not following instructions.
Use caution when using this unit.*

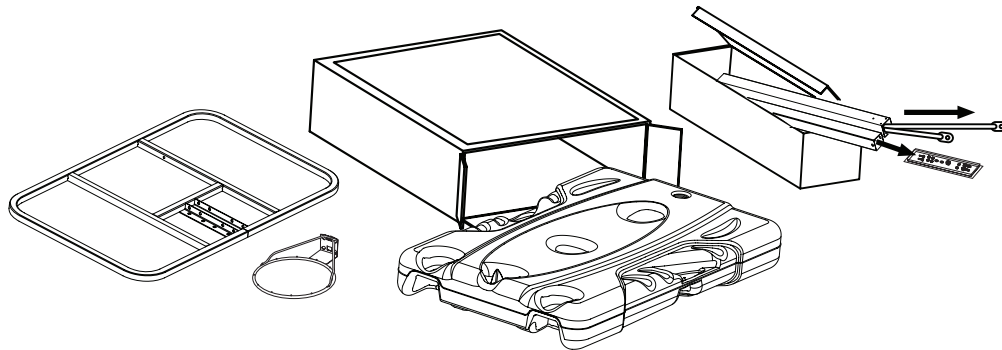

IMPORTANT!

Remove all contents from boxes.
Be sure to check inside pole sections,
hardware and additional parts are packed inside.



Questions or Missing Parts?

DON'T go back to store!

Call TOLL-FREE Customer Service
Number listed on the front page!



WARNING!



IF YOUR SYSTEM IS EQUIPPED WITH AN ACRYLIC OR GLASS BACKBOARD, EXAMINE BACKBOARD FOR ANY DAMAGE THAT MAY HAVE OCCURRED DURING SHIPMENT. CRACKS IN THE BACKBOARD COULD RESULT IN SUDDEN BREAKAGE. IF BACKBOARD IS DAMAGED IN ANY WAY PRIOR TO OR AFTER ASSEMBLY, CALL TOLL-FREE NUMBER: U.S. 1-800-558-5234; CANADA: 1-800-284-8339; www.spalding.com



Basketball System Warranty

For the very latest Basketball System Warranty information
Please visit the Spalding Basketball website at www.Spalding.com

Contact Spalding Customer Service at phone # 1-800-558-5234

Système de basket-ball garantie

Pour l'information de garantie de système de basket-ball plus tard
Visitez le site Web de Spalding Basketball à www.Spalding.com

Contacter le Service clientèle Spalding au # de téléphone 1-800-558-5234

Basketball-System Garantie

Die neuesten Basketball System-Garantie informationen
Besuchen Sie bitte die Spalding Basketball-Website unter www.Spalding.com


Spalding-Kundendienst am Telefon # 1-800-558-5234

Sistema de baloncesto Garantía de dueños


Para la última información de garantía del sistema de baloncesto
Por favor visite el sitio web de Spalding Basketball en www.Spalding.com

Póngase en contacto con servicio al cliente de Spalding en teléfono # 1-800-558-5234

FRONT VIEW

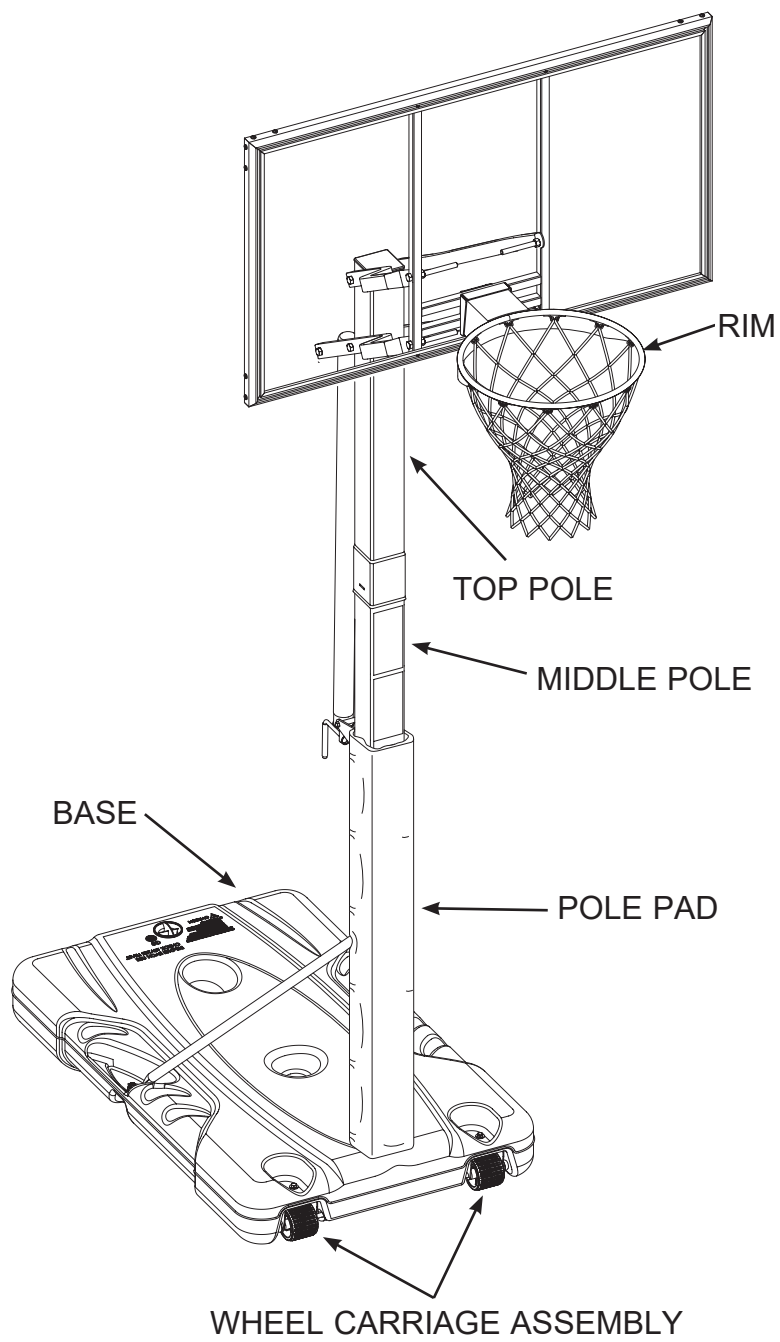

BACK VIEW

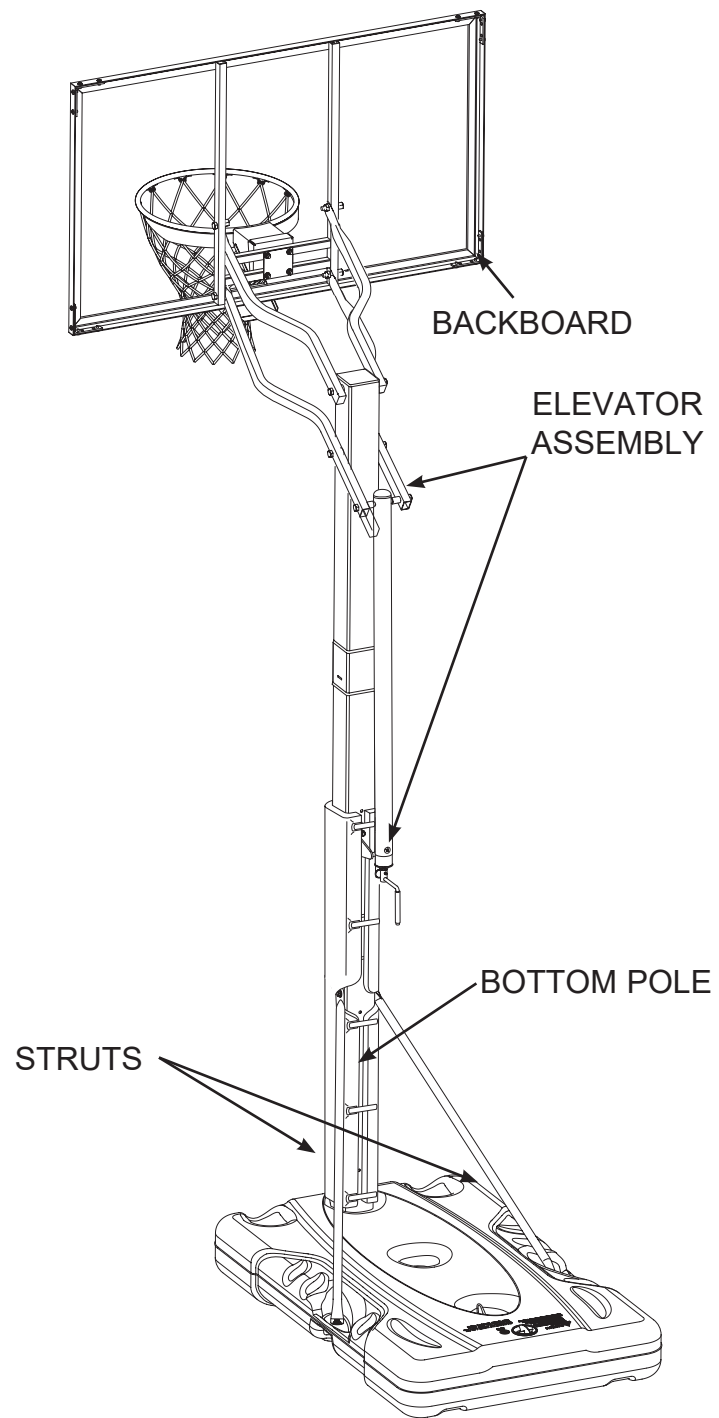

PARTS LIST - See Hardware Identifier

<u>Item</u>	<u>Qty.</u>	<u>Part No.</u>	<u>Description</u>	<u>Item</u>	<u>Qty.</u>	<u>Part No.</u>	<u>Description</u>
1	1	600262	Base	30	8	201651	Spacer, Plastic, 0.530 I.D. x 0.25 Long
2	2	901225	Strut, Pole to Base	31	7	206340	Lock Nut, Hex 1/2-13
3	1	702574	Screw Jack Assembly	32	2	901224	Elevator Tube, Lower - Long
4	1	901217	Top Pole Section	33	1	568090	Label, Height Adjustment and Moving
5	1	901216	Middle Pole Section			FR568090	Label, Height Adjustment and Moving, French
6	1	901218	Bottom Pole Section	34	1	901220	Rim
7	2	800332	Wheel Bracket	35	2	901223	Elevator Tube, Upper - Short
8	2	600056	Wheel, 3.5"	36	2	202587	Spacer, 0.530 I.D. x 1" Long
9	1	10830601	Rod, Axle	37	1	203470	Washer, Flat, 0.625 I.D. x 1.5 O.D.
10	2	203099	Nut, Ny-lock, 5/16-18	38	1	600052	Cap, Pole Top
11	1	600165	Cap, Cover, Height Indicator	39	2	209290	Screw, #10-0.394" Long
12	1	202662	Bolt, Hex Head, 5/16-18 x 4.5 Long	40	1	908726	Frame, Base
13	2	207550	Pushnut, 7/16 Shaft Diameter	41	1	203617	Cap, Base
14	8*	203100	Hex Flange Nut 5/16-18	42	2	901228	Reinforcement Bracket
15	1	901222	Bracket, Pole Mount	43	1	203795	Nut, Special, 3/8-16
16	2	207408	Carriage Bolt, 5/16-18 x 4.75 Long	44	1	901219	Bracket, Slam Jam
17	1		Net	45	1	206048	Bolt, Tee, 3/8-16, 3.25" Long
18	6	203153	Bolt, Hex Head, 5/16-18 x .75 Long	46	1	200318	Bracket, Reinforcement, Slam Jam
19	1	108181	Plate, Pole Mounting	47	1	208760	Spring, Rim
20	1	201518	Bolt, Hex Head, 5/16-18 x 2.75 Long	48	1		Backboard
21	1	700009	Handle, Elevator Assembly	49	1	6001401	Cover, Upper Tube, Plastic
22	1	202528	Pin, Actuator Assembly	50	1	600306	Board Pad, Left Section
23	4	206665	Bolt, Hex Head, 1/2-13 x 2 Long	51	1	600307	Board Pad, Right Section
24	12	203218	Washer, Flat, 5/16	52	1	600308	Board Pad, Center Section
25	2	203679	Bolt, Hex Head, 3/8-16 x 2 Long	53	2	201596	Screw, 1/4 x 1.25
26	6	203104	Bolt, Hex Flange, 5/16-18 x 2 Long	54	8	206303	Washer, Flat
27	1	20865601	Pole Pad	55	1	205355	Drill Bit 11/64"
28	1	901971	Cover Plate, Rim	56	8	202871	Screw, 1/4 x .75
29	3	205678	Bolt, Hex Head, 1/2-13 x 7 Long	57	8	202219	Protector, 1/4", Gray













* YOU MAY HAVE EXTRA PARTS WITH THIS MODEL









NOTE

Hardware kit is designed for more than one style of basketball system. Not all hardware will be used.

HARDWARE IDENTIFIER (BOLTS AND SCREWS)

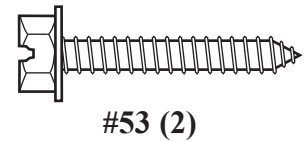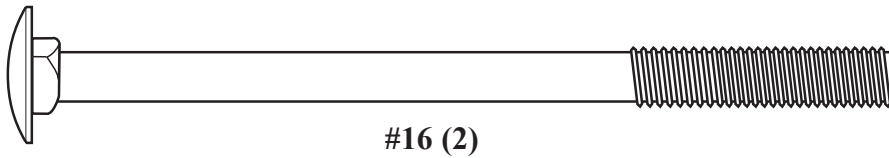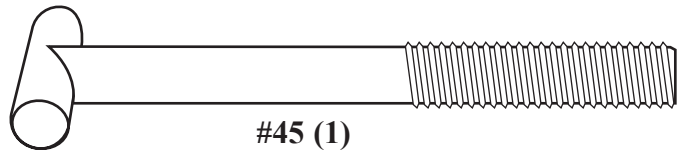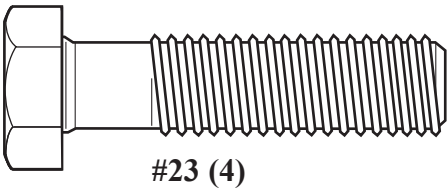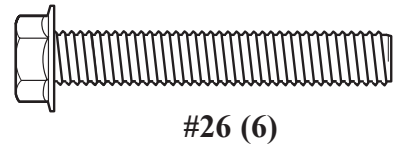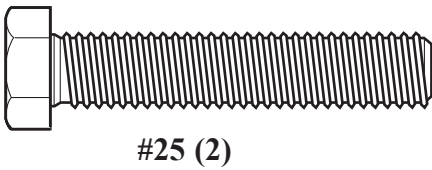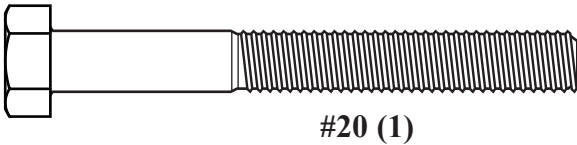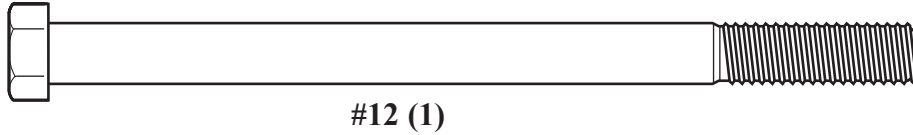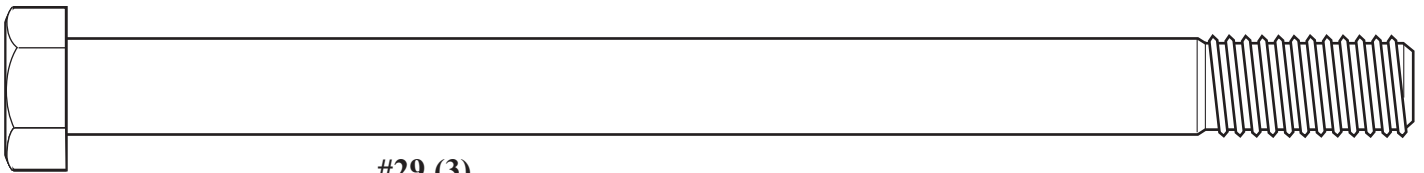


HARDWARE IDENTIFIER (NUTS AND WASHERS)

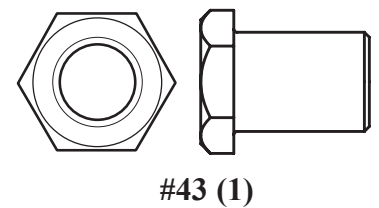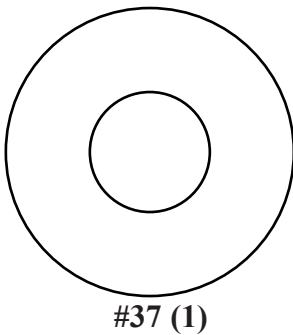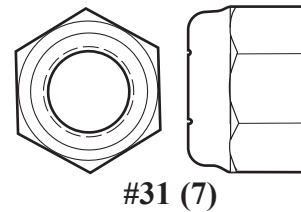


* You may have extra parts with this model.


HARDWARE IDENTIFIER (PLASTIC SPACERS CAPS AND CLIPS)



#13 (2)

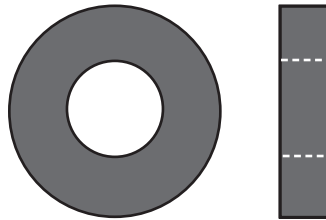

#30 (8)

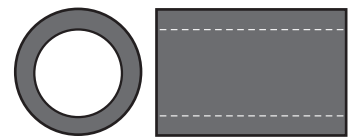


#36 (2)


HARDWARE IDENTIFIER (OTHER)




#55 (1)

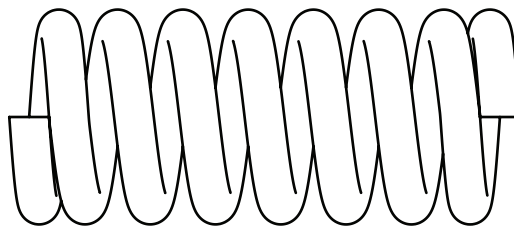

#47 (1)

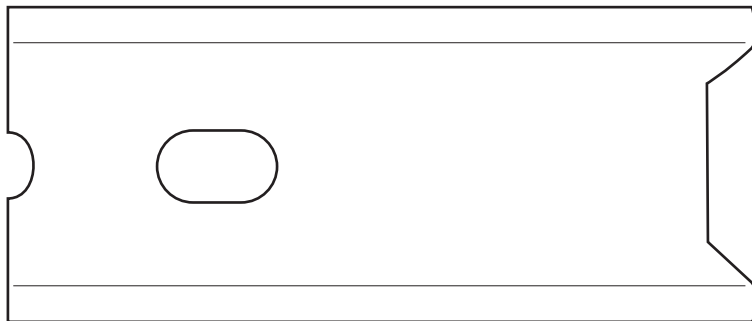


#46 (1)

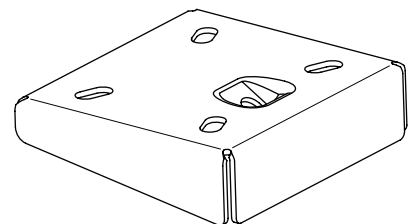

#44 (1)

SECTION A: ASSEMBLE THE BASE

This is what your system will look like when you've finished this section.

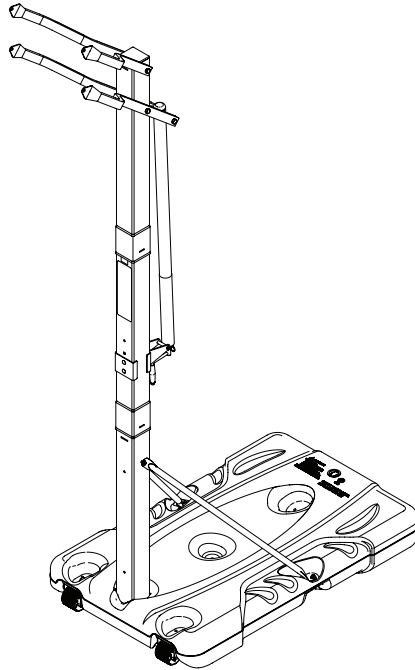

TOOLS REQUIRED FOR THIS SECTION


(2) Wrenches



1/2" and 9/16"

AND/OR


(2) Socket Wrenches and Sockets

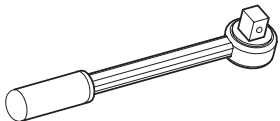


1/2"



9/16"




Extension




**Sawhorse or
Support Table**

Hammer or Mallet




KIT #1


BASE ASSEMBLY - HARDWARE IDENTIFIER KIT #1




#10 (1)

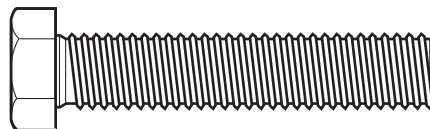


#25 (2)




#13 (2)




#24 (6)




#18 (6)

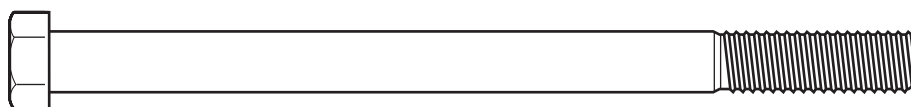


#12 (1)

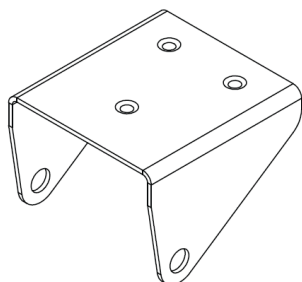

#7 (2)

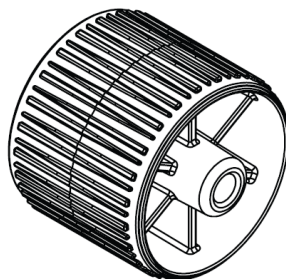

#8 (2)

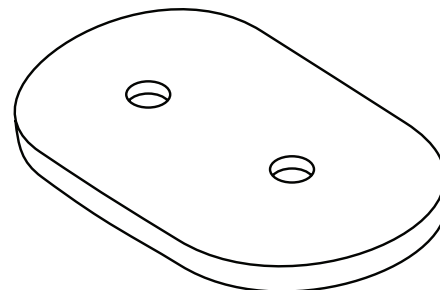



#19 (1)

PARTS LIST - KIT #1


<u>Item</u>	<u>Qty.</u>	<u>Part No.</u>	<u>Description</u>
7	2	800332	Wheel Bracket
8	2	600056	Wheel, 3.5"
9	1	10830601	Rod, Axle
12	1	202662	Bolt, Hex Head, 5/16-18, 4.5 Long
19	1	108181	Plate, Pole Mounting

<u>Item</u>	<u>Qty.</u>	<u>Part No.</u>	<u>Description</u>
			KIT #1
10	1	203099	Nut, Ny-lock, 5/16-18
13	2	207550	Pushnut, 7/16 Shaft Diameter
18	6	203153	Bolt, Hex Head, 5/16-18 x .75 Long
24	6	203218	Washer, Flat, 5/16
25	2	203679	Bolt, Hex Head, 3/8-16 x 2 Long


1. Complete wheel assembly as shown in Figure A. Secure wheel bracket (7) and wheel assembly (Fig. A.) to the tank (1) with bolts (18) and washers (24).

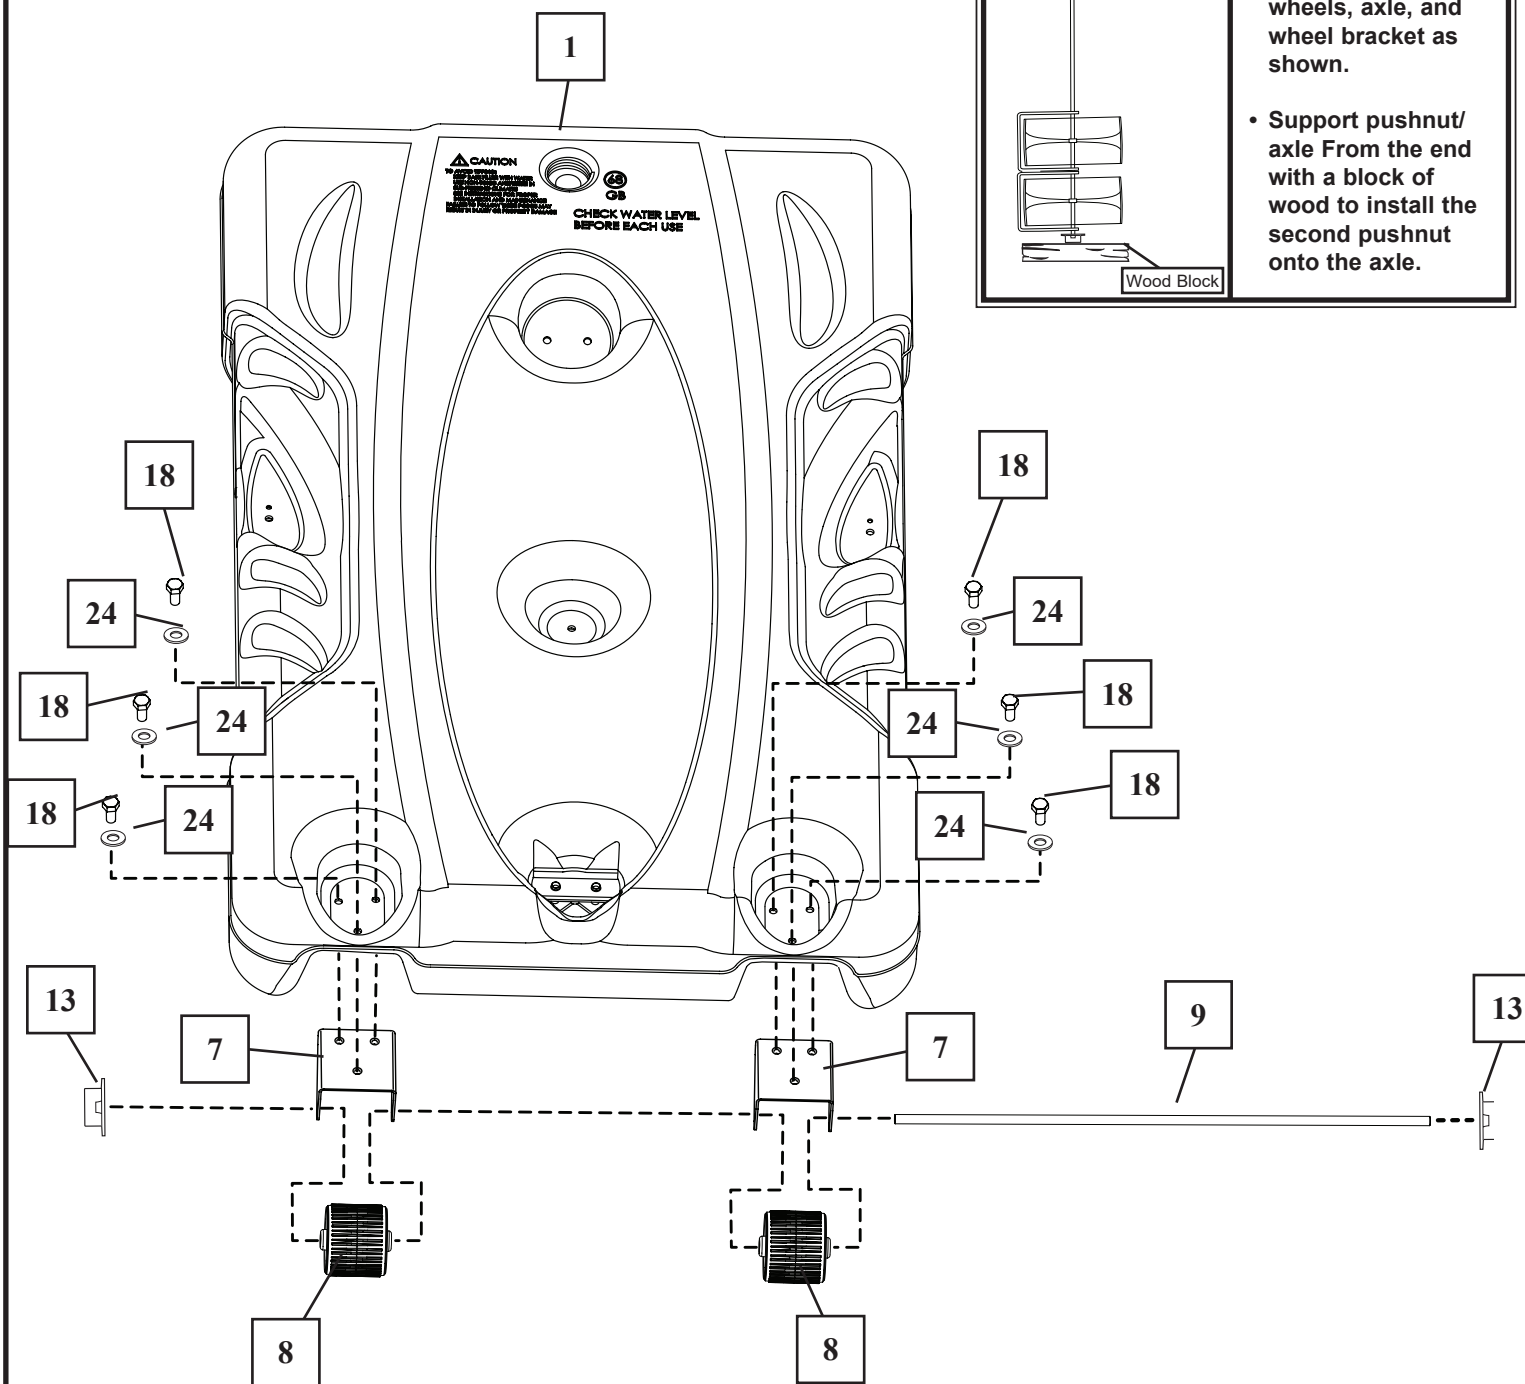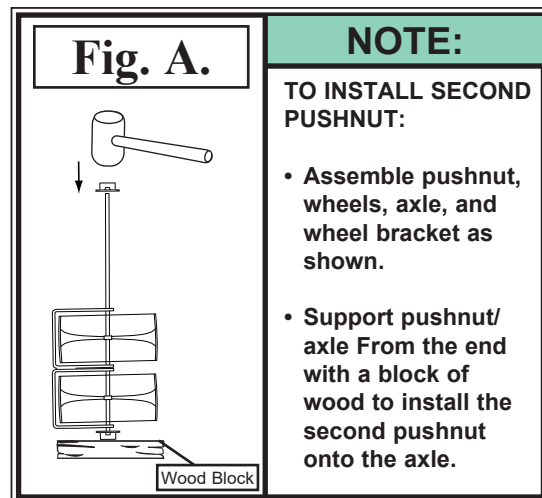



2. Correctly identify each pole section. Measure and mark a line, with tape or marker 4" (10.2 cm) from the top ends of the both the middle pole (5) and bottom pole (6).

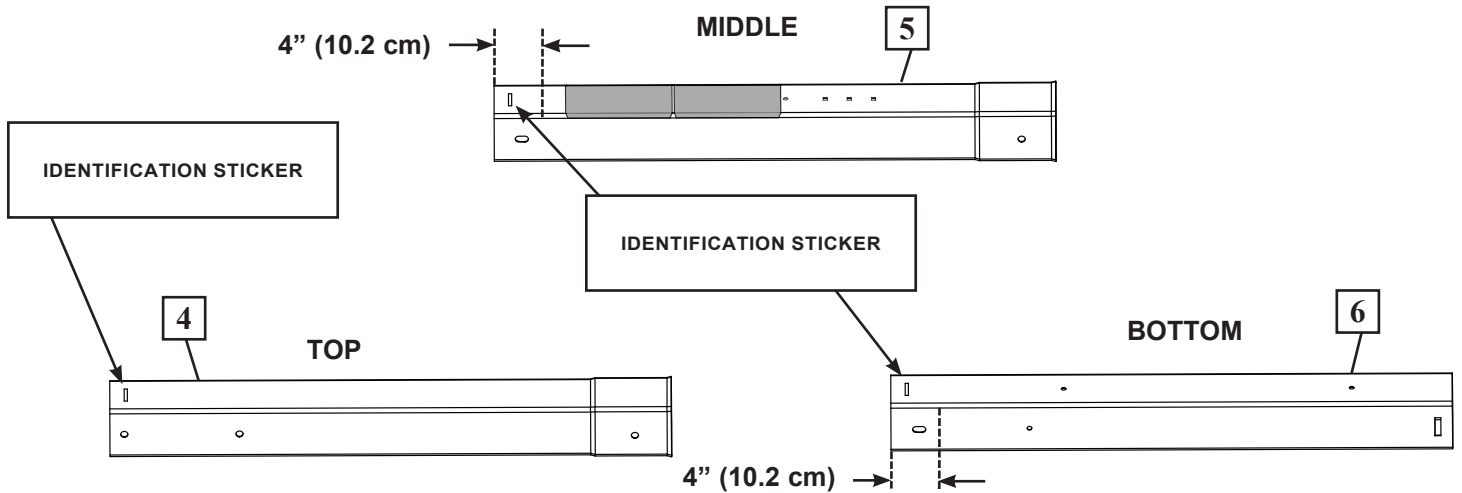


3. Bounce middle pole section (5) into top section (4) using a wood scrap as shown until the top pole longer moves to the 4" (10.2 cm) line you made previously on the middle pole (5).

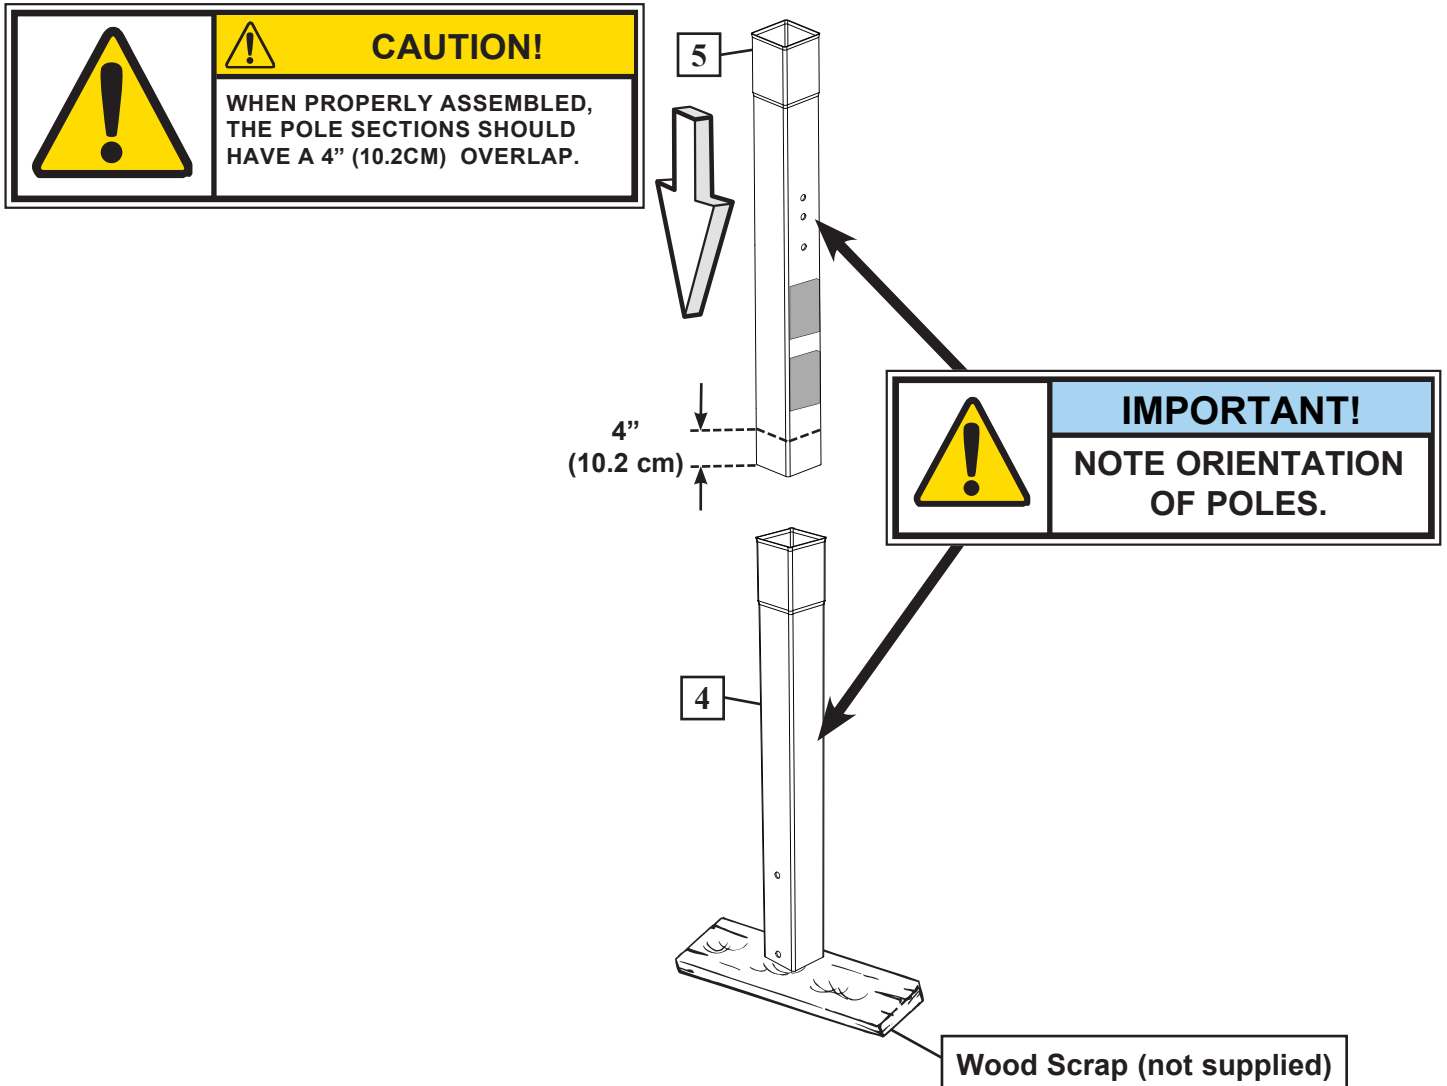


4. Bounce top and middle pole assembly (4 and 5) onto bottom pole section (6) using a wood scrap as shown. Bounce until the top and middle pole assembly moves to 4" (10.2 cm) line you made previously on the bottom pole (6)

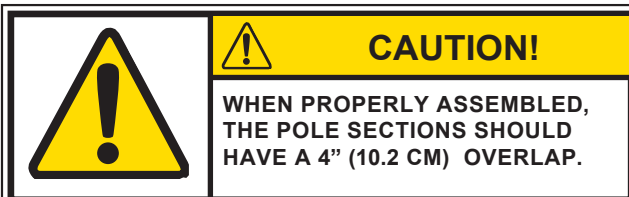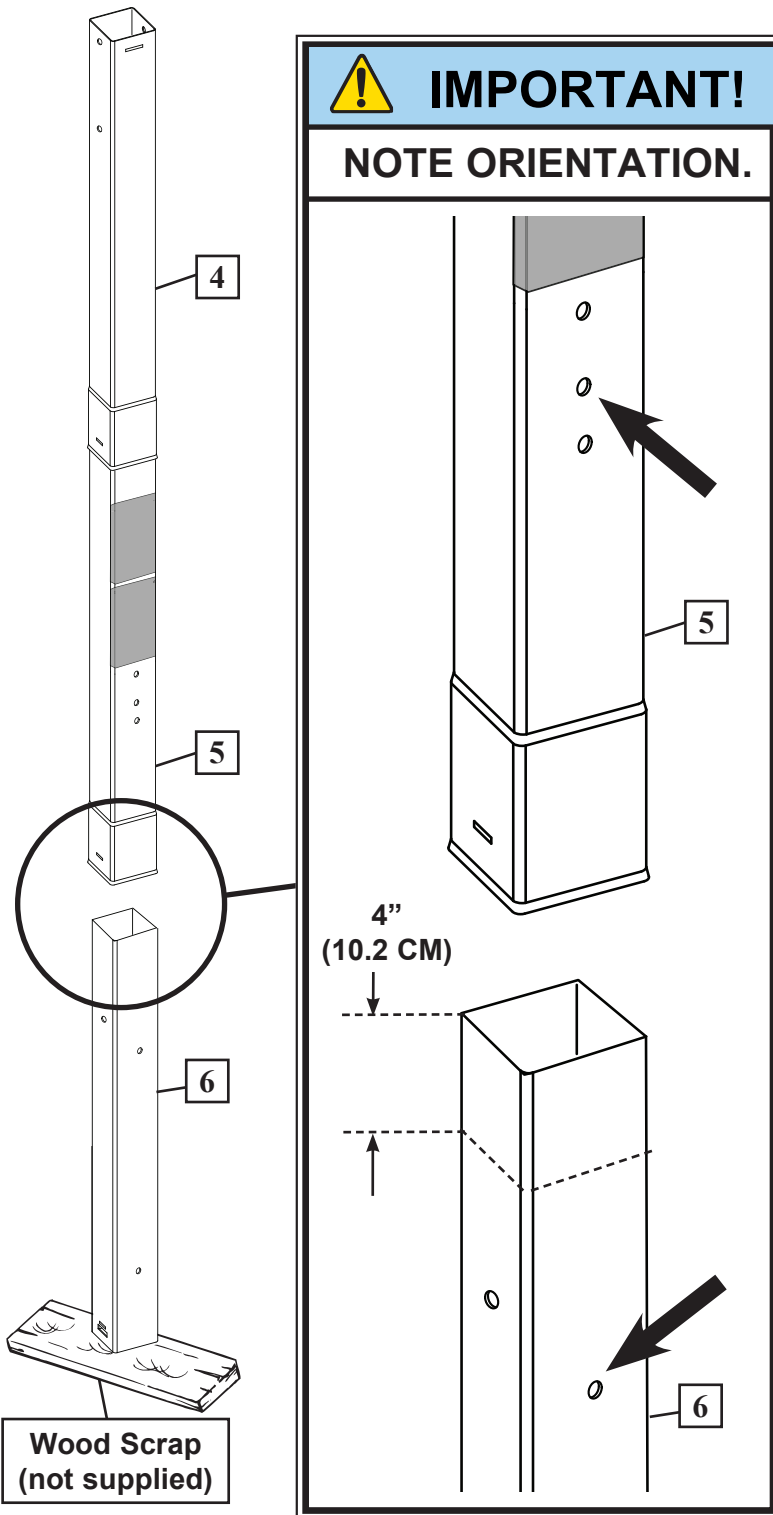


5. Attach pole assembly to base (1) as shown. Secure pole assembly to base using bolts (25), foot-base (58) and pole mounting plate (19) as shown.

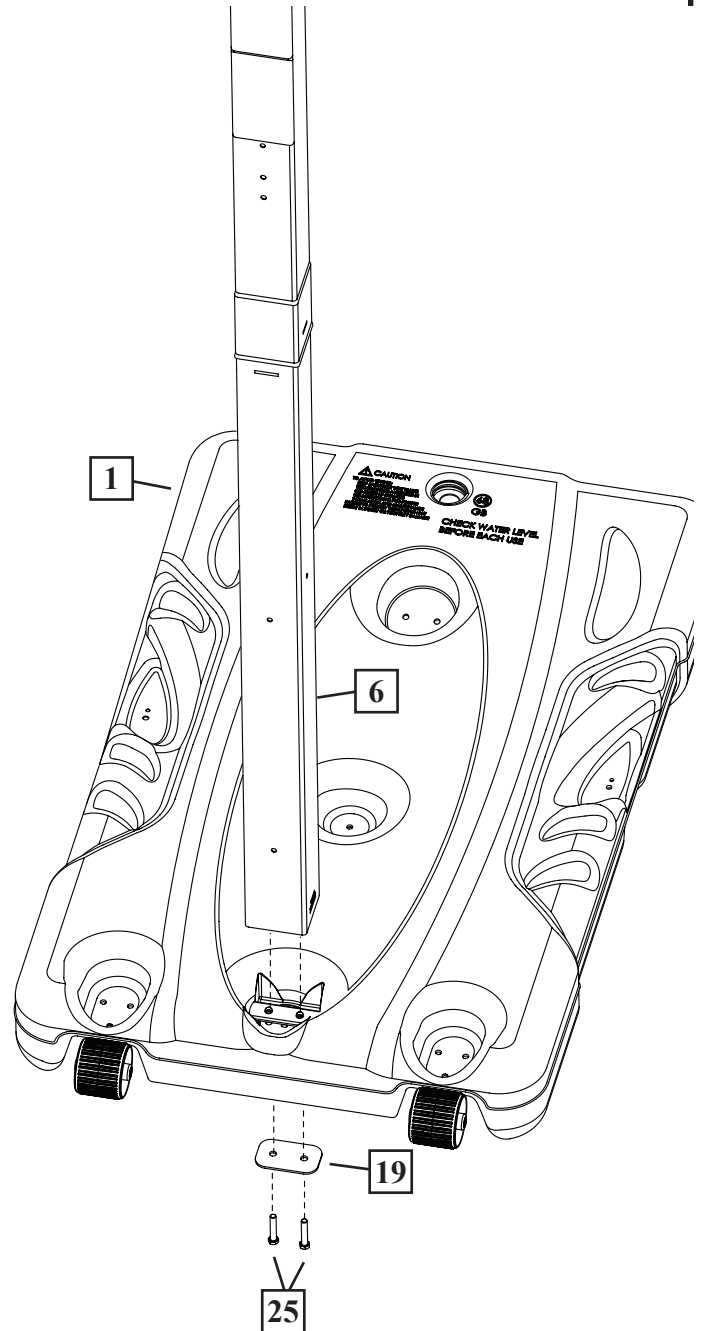


6. Secure base struts (2) to pole as shown.

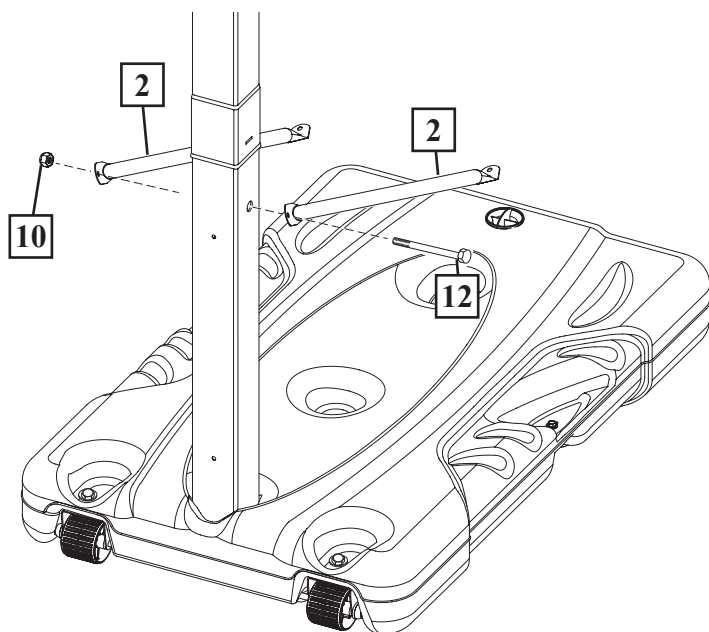


7. Tip base assembly forward and slide base frame (40) underneath the base.

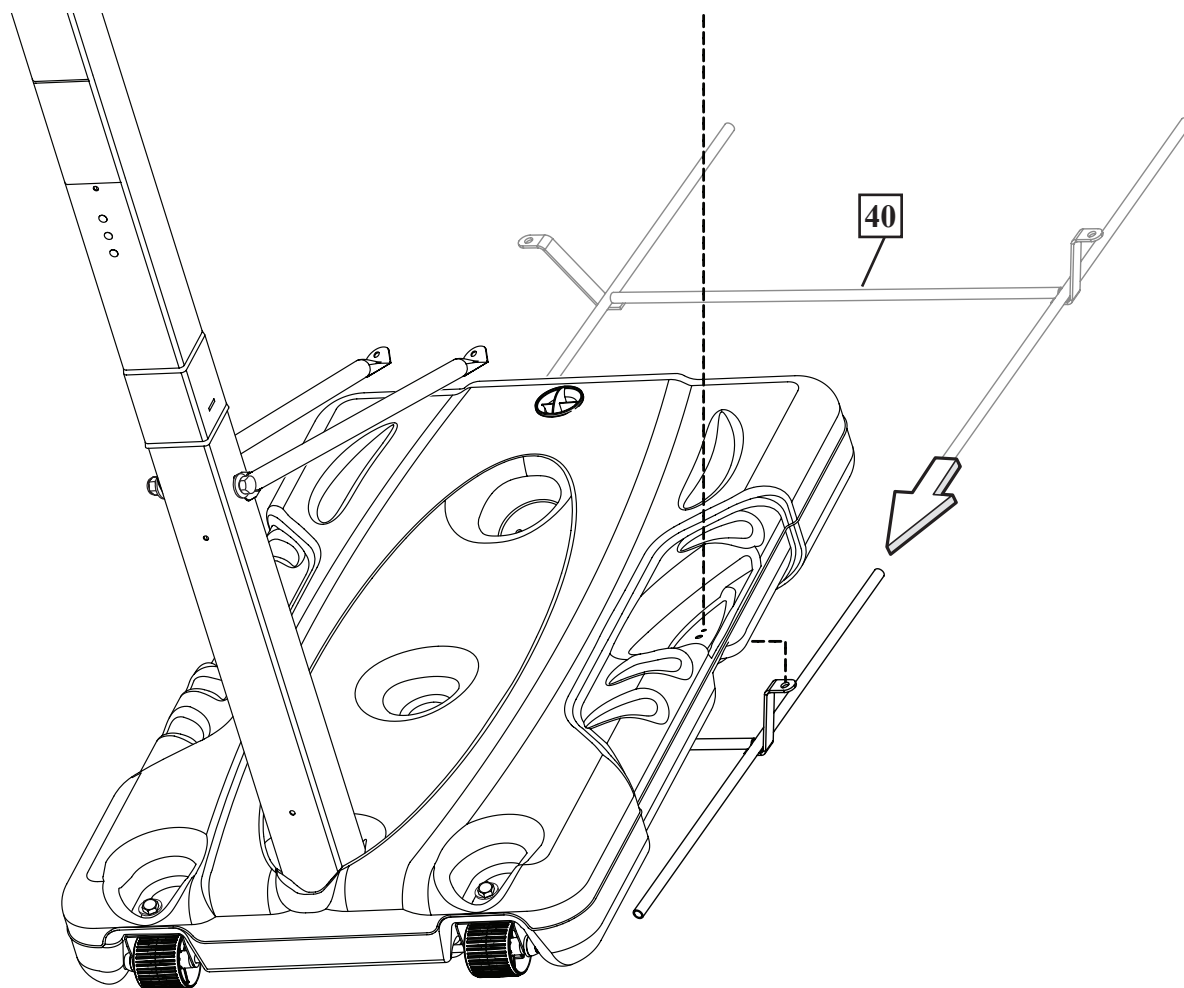


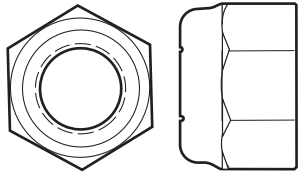KIT #2**POLE ASSEMBLY - HARDWARE IDENTIFIER KIT #2**

#31 (6)




#24 (4)




#14 (4)




#26 (6)

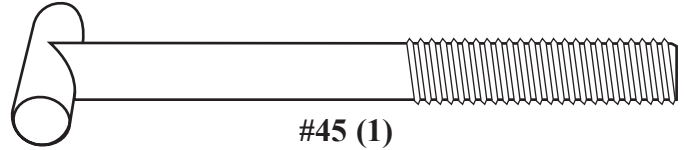


#45 (1)

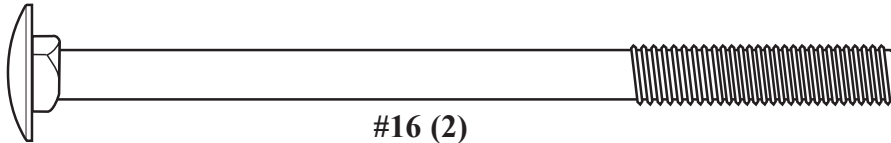


#16 (2)




#15 (1)

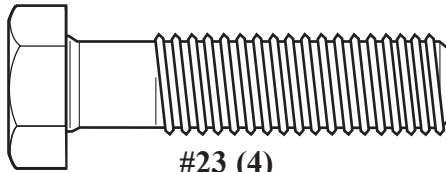


#23 (4)

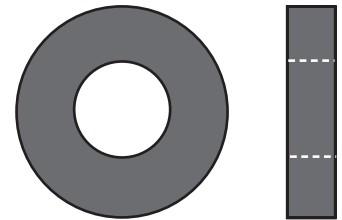


#30 (8)

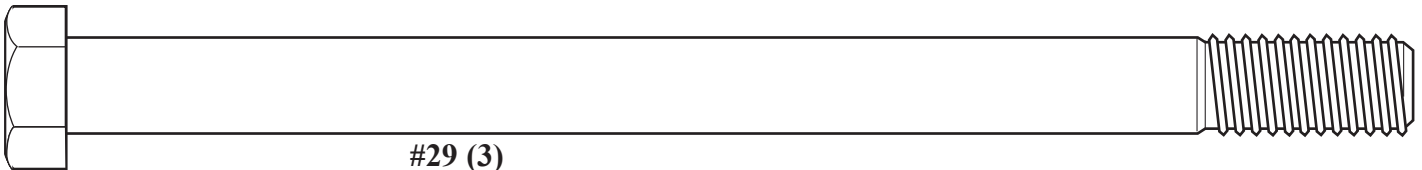


#29 (3)



#38 (1)

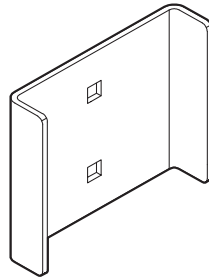

#42 (2)


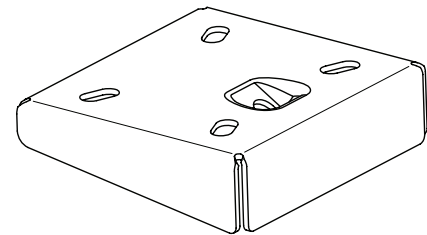


#44 (1)

PARTS LIST - KIT #2

<u>Item</u>	<u>Qty.</u>	<u>Part No.</u>	<u>Description</u>	<u>Item</u>	<u>Qty.</u>	<u>Part No.</u>	<u>Description</u>
15	1	901222	Bracket, Pole Mount	14	4	203100	Hex Flange Nut 5/16-18
23	4	206665	Bolt, Hex Head, 1/2-13 x 2 Long	16	2	207408	Carriage Bolt, 5/16-18 x 4.75 Long
29	3	205678	Bolt, Hex Head, 1/2-13 x 7 Long	24	4	203218	Washer, Flat, 5/16
30	8	201651	Spacer, Plastic, 0.530 I.D. x 0.25 Long	26	6	203104	Bolt, Hex Flange, 5/16-18 x 2 Long
38	1	600052	Cap, Pole Top	31	6	206340	Lock Nut, Hex 1/2-13
42	2	901228	Reinforcement Bracket	45	1	206048	Bolt, Tee, 3/8-16, 3.25" Long
44	1	901219	Bracket, Slam Jam				


8. Rotate non-secured ends of the rear base struts (2) outward to mounting holes in base as shown. Secure non-secured ends of base struts (2) to base (1) and base frame (40) as shown. Repeat for opposite side.

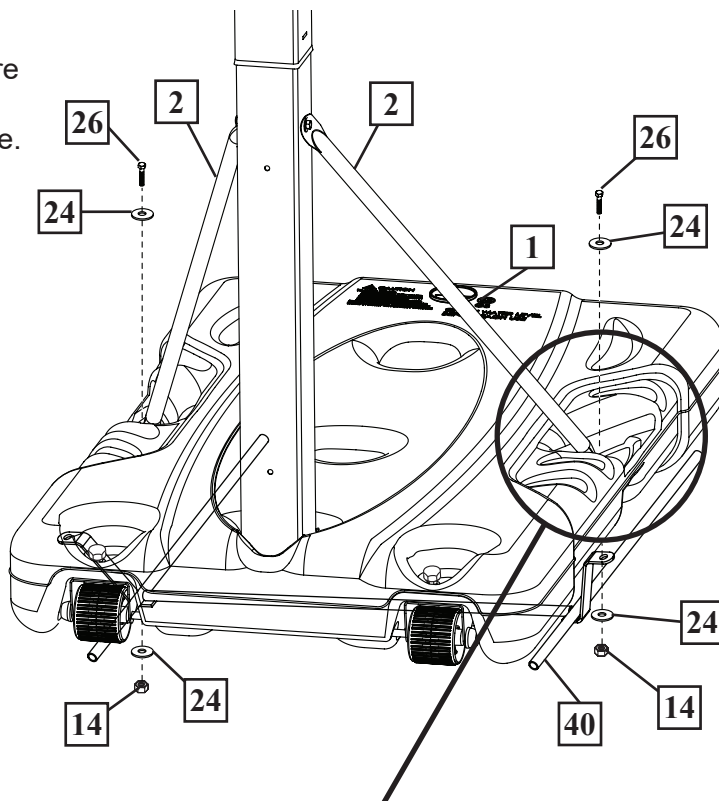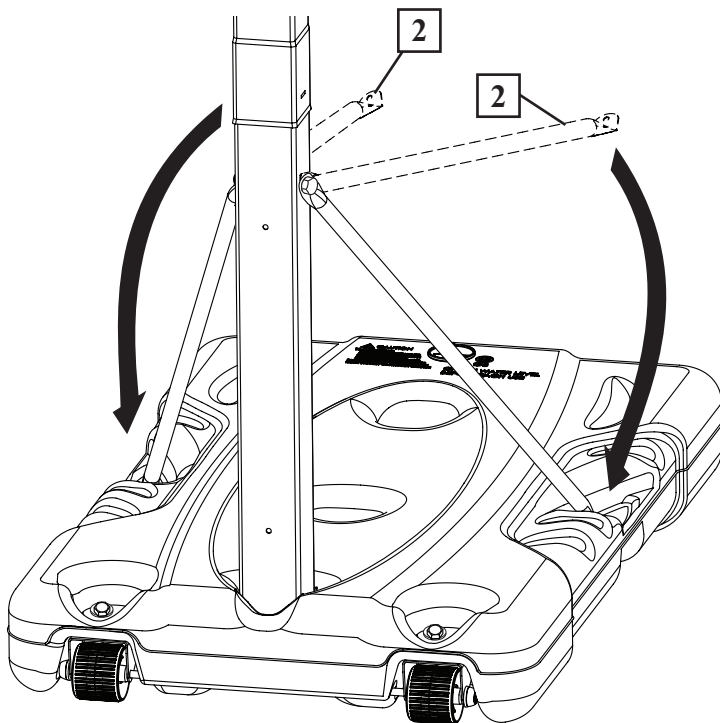



WARNING!

TWO CAPABLE ADULTS REQUIRED FOR THIS PROCEDURE. FAILURE TO FOLLOW THIS WARNING COULD RESULT IN SERIOUS INJURY AND/OR PROPERTY DAMAGE.



IMPORTANT!

Struts MUST be attached to the base through the REAR holes.



IMPORTANT!

DO NOT TIGHTEN COMPLETELY.

9. Install pole mount bracket (15) and reinforcement brackets (42) with carriage bolts (16) as shown. Tighten flange nuts (14) completely.




IMPORTANT!

TIGHTEN ALL HARDWARE FROM STEPS 6-8 AFTER THIS ASSEMBLY IS COMPLETED.




IMPORTANT!

DO NOT OVER TIGHTEN!

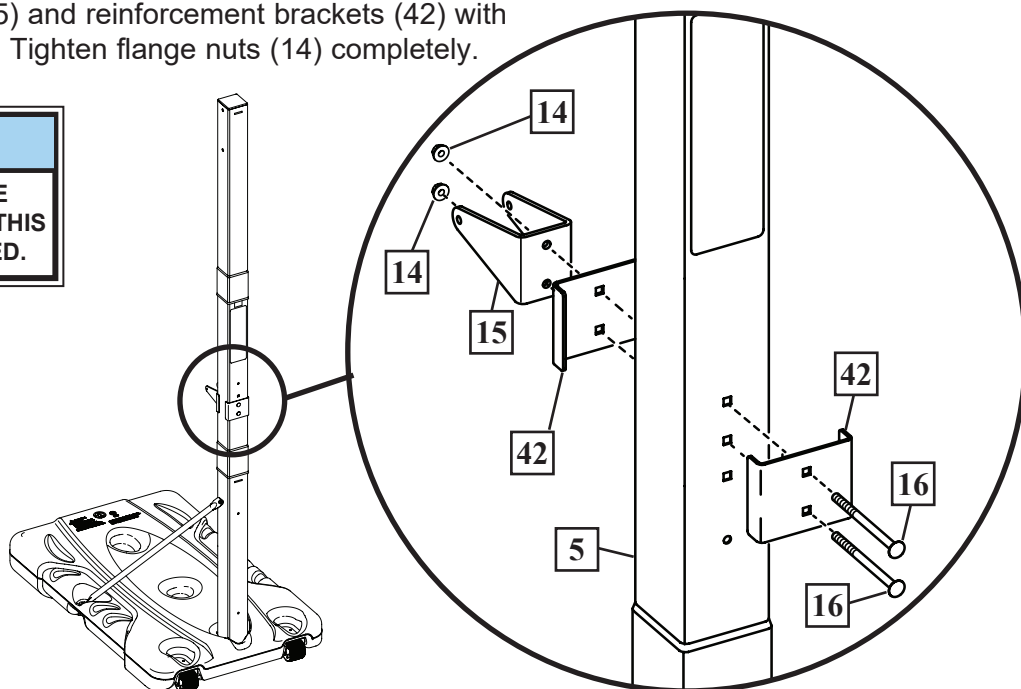

- 10.** Securely rest the assembly on sawhorse. Identify elevator tubes (32 and 35).

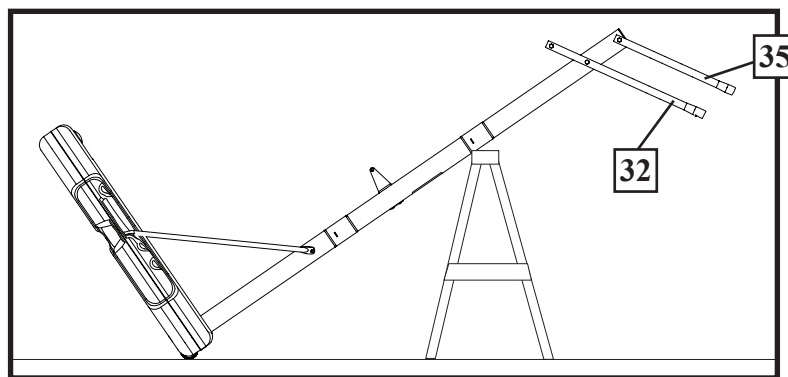




Toward Pole

Upper Elevator Tube

Toward Board


Lower Elevator Tube

- 11.** While the system is securely resting on the sawhorse. Install elevator tubes (32 and 35) to top pole section (4) as shown. Install pole cap (38) at this time.

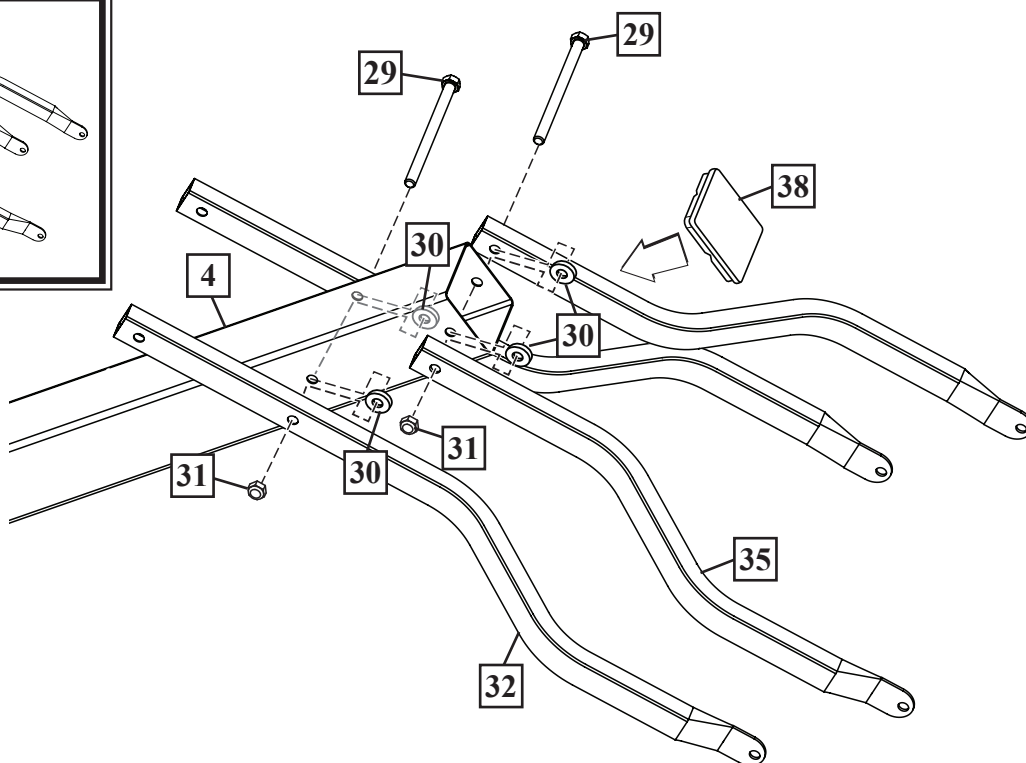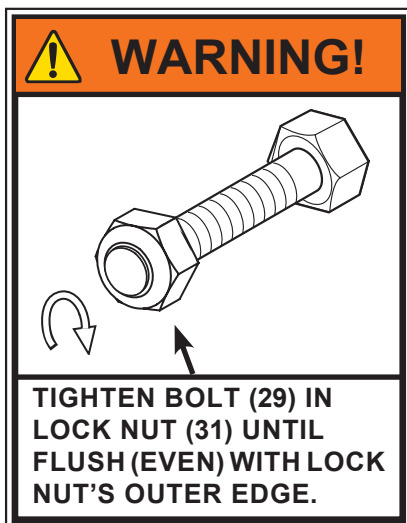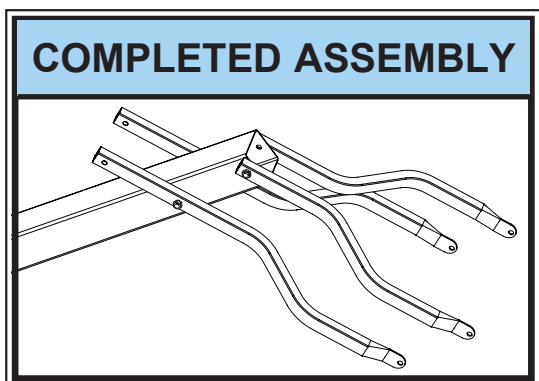


SECTION B: ATTACH THE BACKBOARD

This is what your system will look like when you've finished this section.

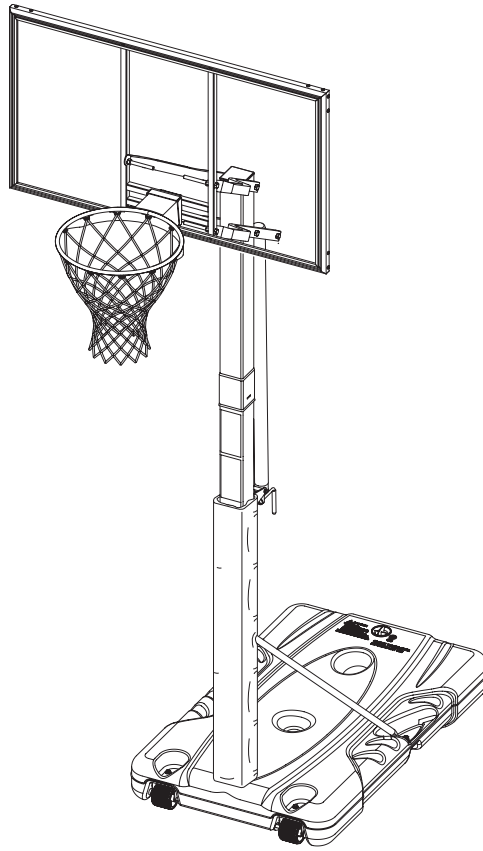

TOOLS REQUIRED FOR THIS SECTION


(2) Wrenches



1/2" and 3/4"

AND/OR


(2) Socket Wrenches and Sockets

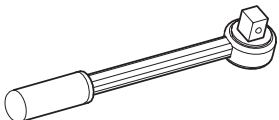


1/2"




3/4"



Extension





**Sawhorse or
Support Table**




Phillips Screwdriver

1. While still supported on sawhorse. Attach elevator tubes (32, 35) to backboard using spacers (30), bolts (23), and nuts (31) as shown.

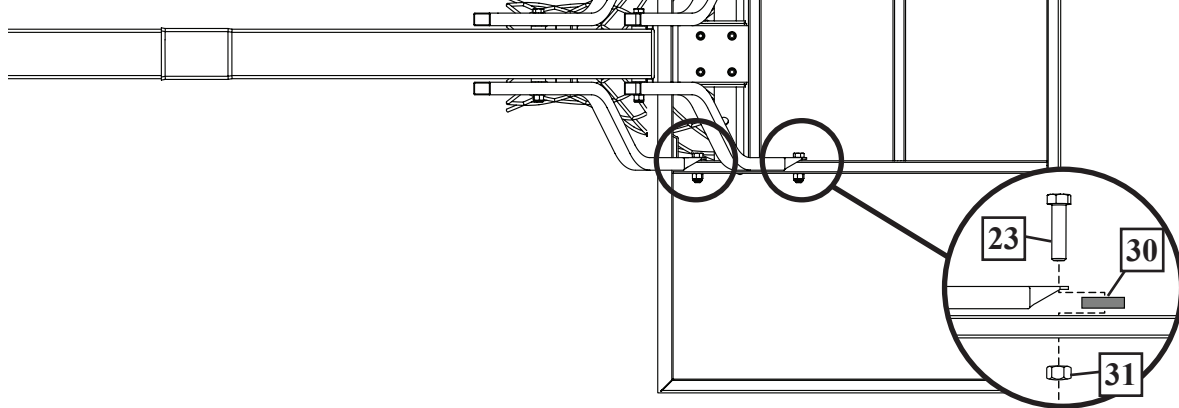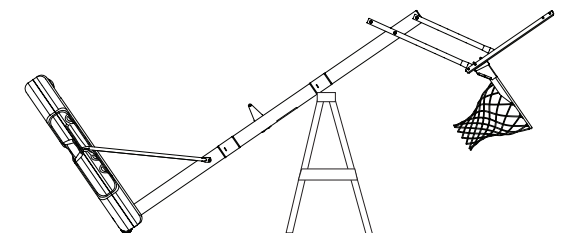


2. Insert T-bolt (45) into Slam Jam bracket (44) then, attach that assembly to board using bolts (26) and nuts (14).

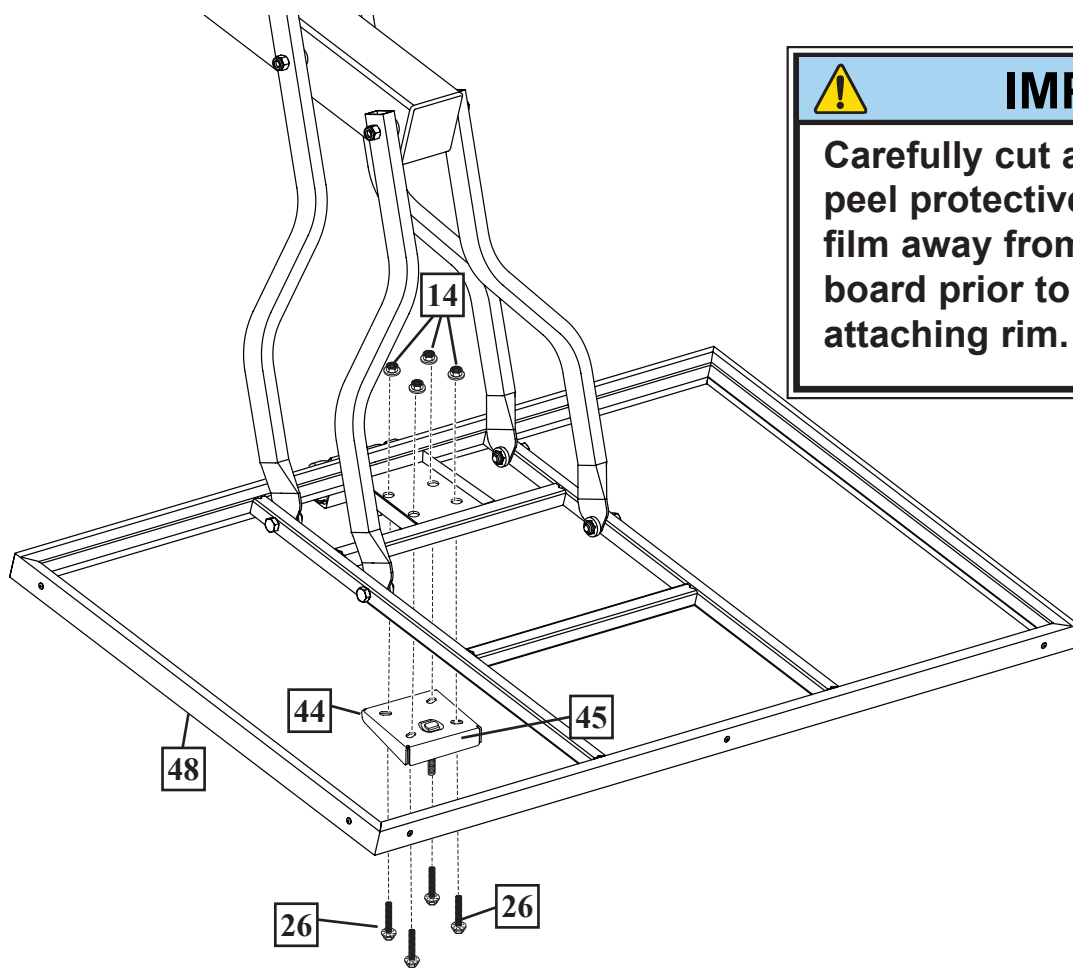


IMPORTANT!


Carefully cut and peel protective film away from board prior to attaching rim.

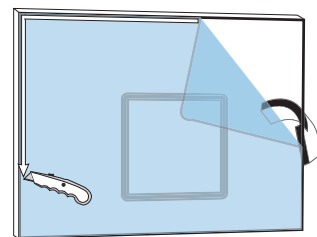


WARNING!

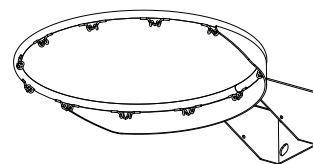


Install rim using hand tools only!

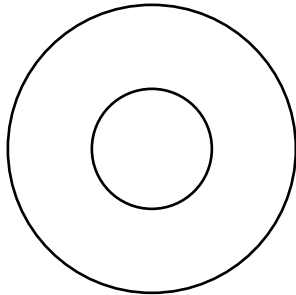


#37 (1)




#39 (2)

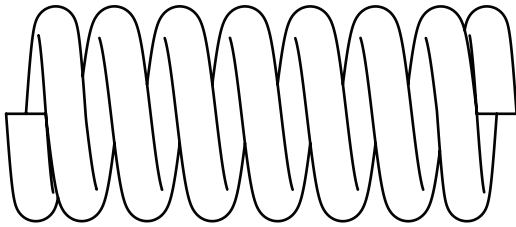


#47 (1)

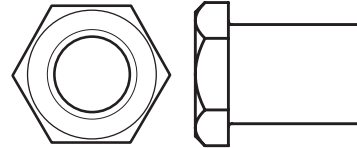

#43 (1)

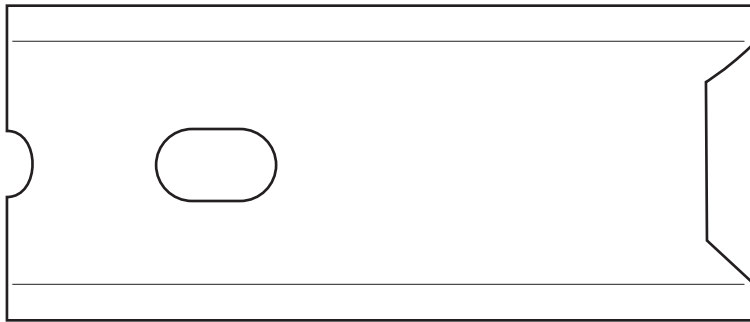

#46 (1)

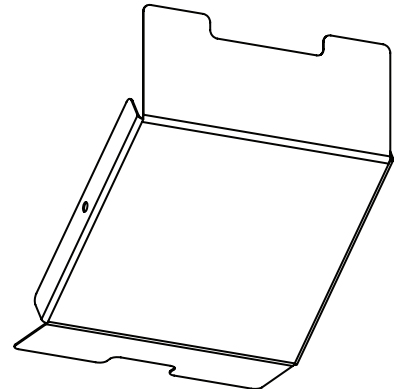

#28 (1)

PARTS LIST - KIT #3

<u>Item</u>	<u>Qty.</u>	<u>Part No.</u>	<u>Description</u>
28	1	901971	Cover Plate, Rim


<u>Item</u>	<u>Qty.</u>	<u>Part No.</u>	<u>Description</u>
			KIT #3
37	1	203470	Washer, Flat, 0.625 I.D. x 1.5 O.D.
39	2	209290	Screw, #10-0.394" Long
43	1	203795	Nut, Special, 3/8-16
46	1	200318	Bracket, Reinforcement, Slam Jam
47	1	208760	Spring, Rim

3.






Install Slam Jam Rim to Backboard

- A. Fit rim (34) securely into bracket (44) as shown. Allow T-bolt (45) to slip through center hole in rim (34).
- B. Install reinforcement bracket (46) onto T-bolt (45) as shown.
- C. Install spring (47) onto T-bolt (45) as shown.
- D. Install special nut (43) and washer (37) onto T-bolt (45).
- E. Tighten nut (43) until flush with end of T-bolt (45).

NOTE:





**ORIENTATION
OF BRACKET**

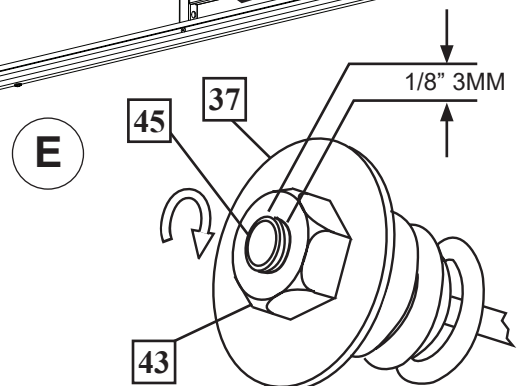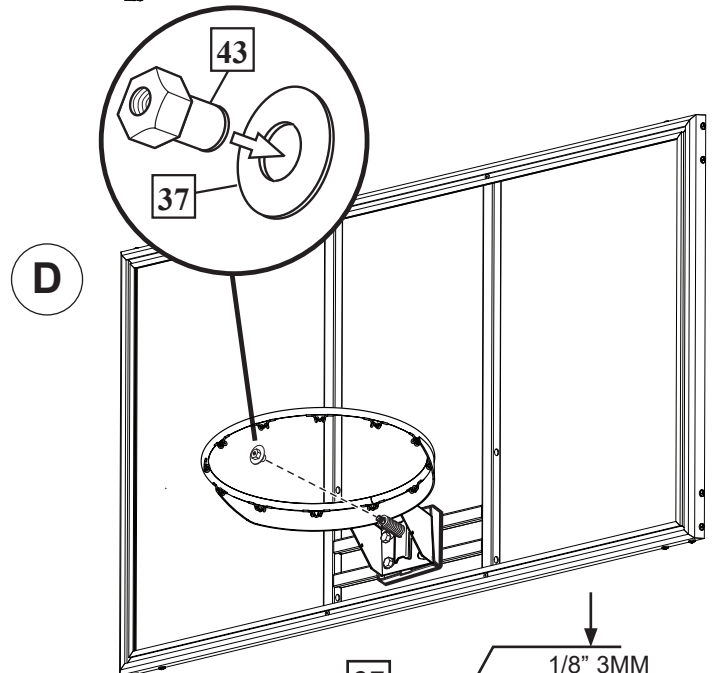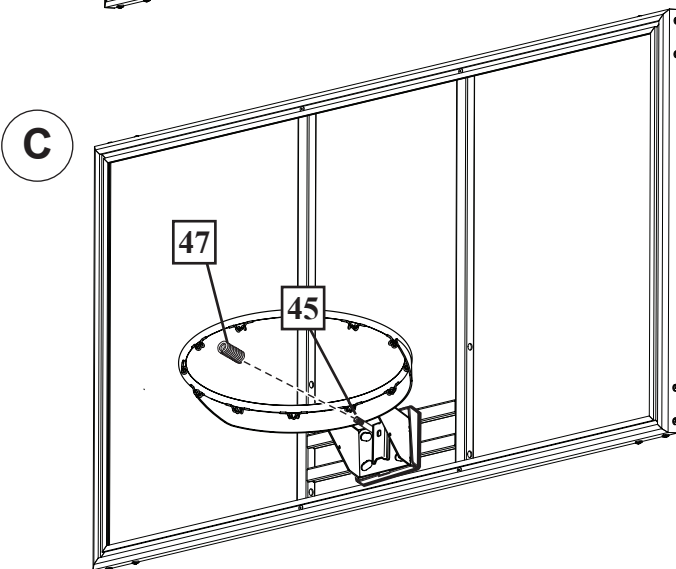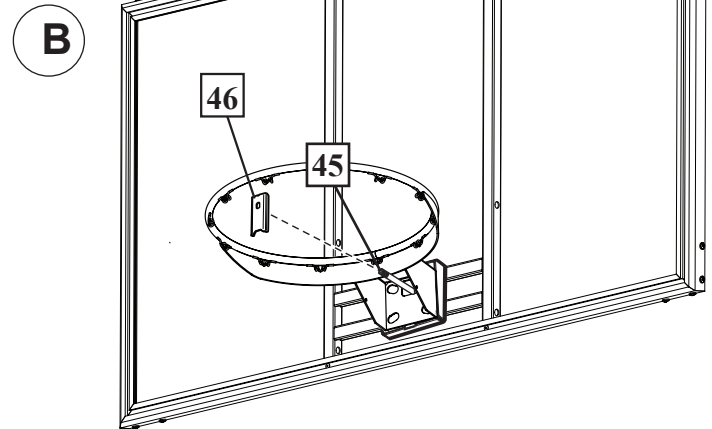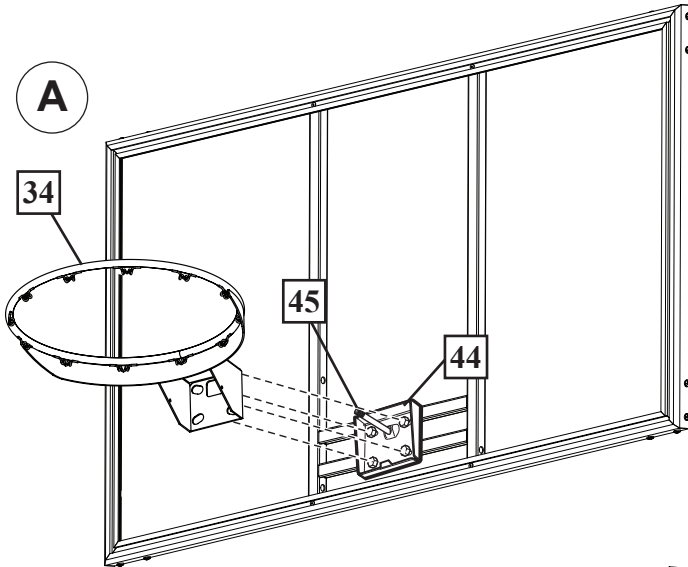







RIM COVER ATTACHMENT

4.

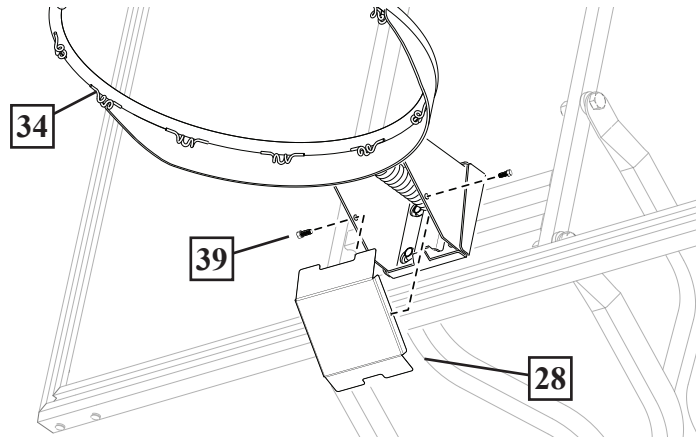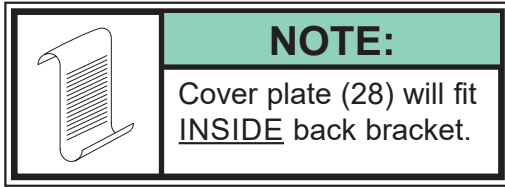

KIT #4

ATTACH THE ELEVATOR ASSEMBLY - HARDWARE IDENTIFIER - KIT #4

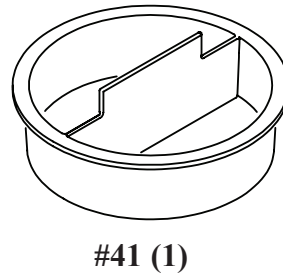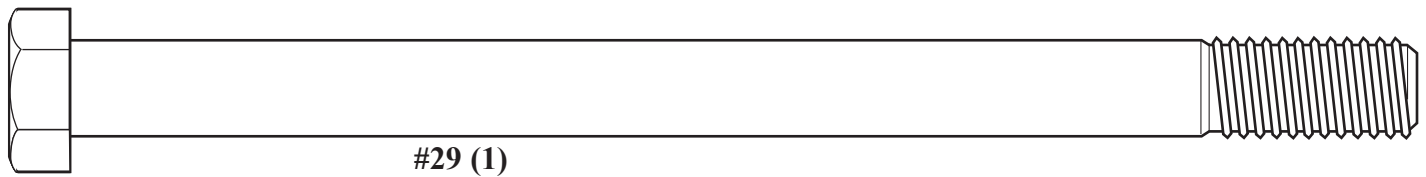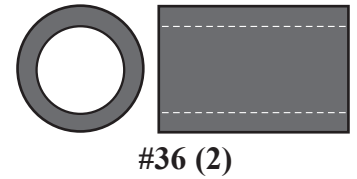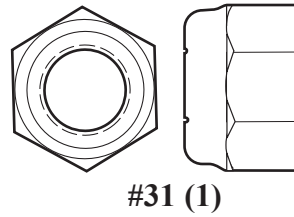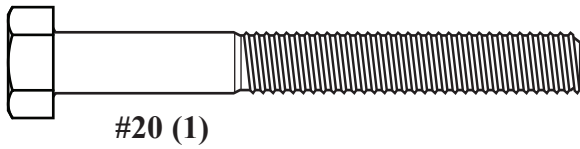

PARTS LIST - KIT #4


Item	Qty.	Part No.	Description
17	1		Net
29	1	205678	Bolt, Hex Head, 1/2-13 x 7 Long
41	1	203617	Cap, Base

Item	Qty.	Part No.	Description
			KIT #4
10	1	203099	Nut, Ny-lock, 5/16-18
20	1	201518	Bolt, Hex Head, 5/16-18 x 2.75 Long
31	1	206340	Lock Nut, Hex 1/2-13
36	2	202587	Spacer, 0.530 I.D. x 1" Long

1.


A

Place cover (49) onto screw-jack assembly (3). Install cap (11).

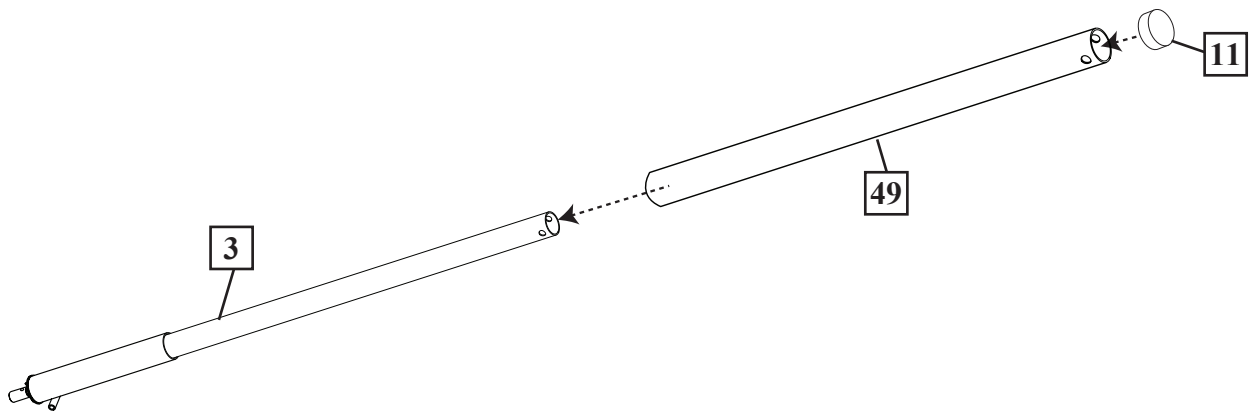


B

Install handle assembly (3, 17 and 11) to lower elevator tubes (32) using bolt (29), spacers (36), and nut (31) as shown.



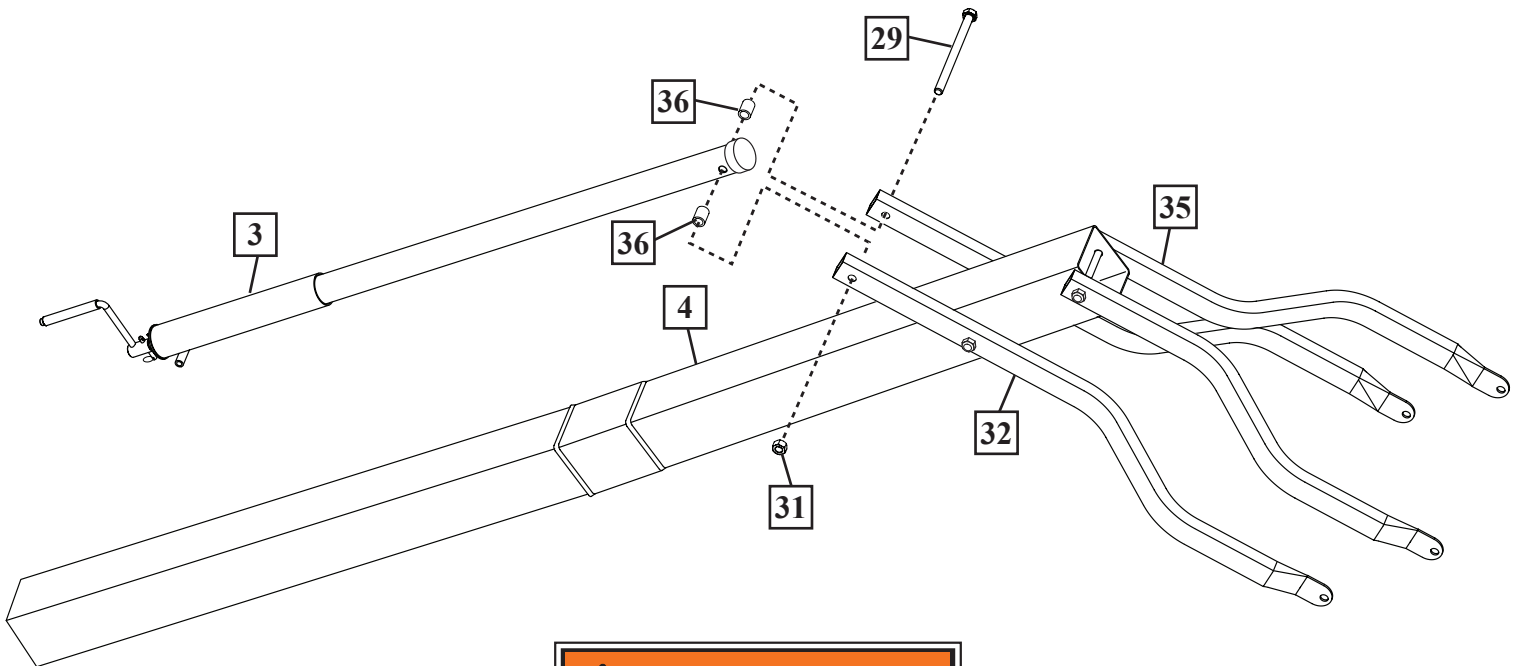


WARNING!

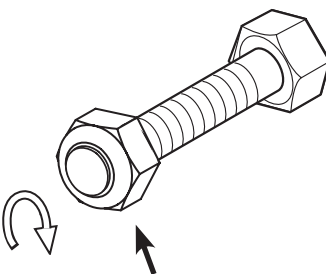


TIGHTEN BOLT (29) IN
LOCK NUT (31) UNTIL
FLUSH (EVEN) WITH LOCK
NUT'S OUTER EDGE.

2. Secure the handle assembly (3 and 11) to pole bracket (15) using bolt (20) and nut (10) as shown.

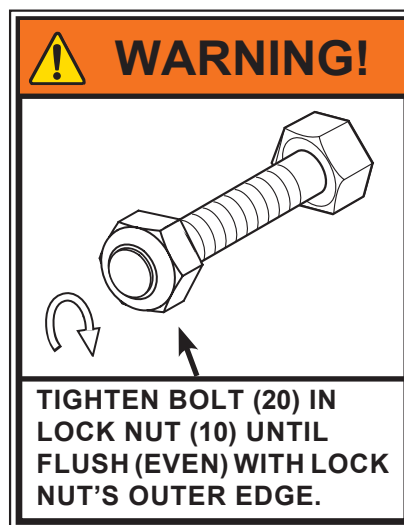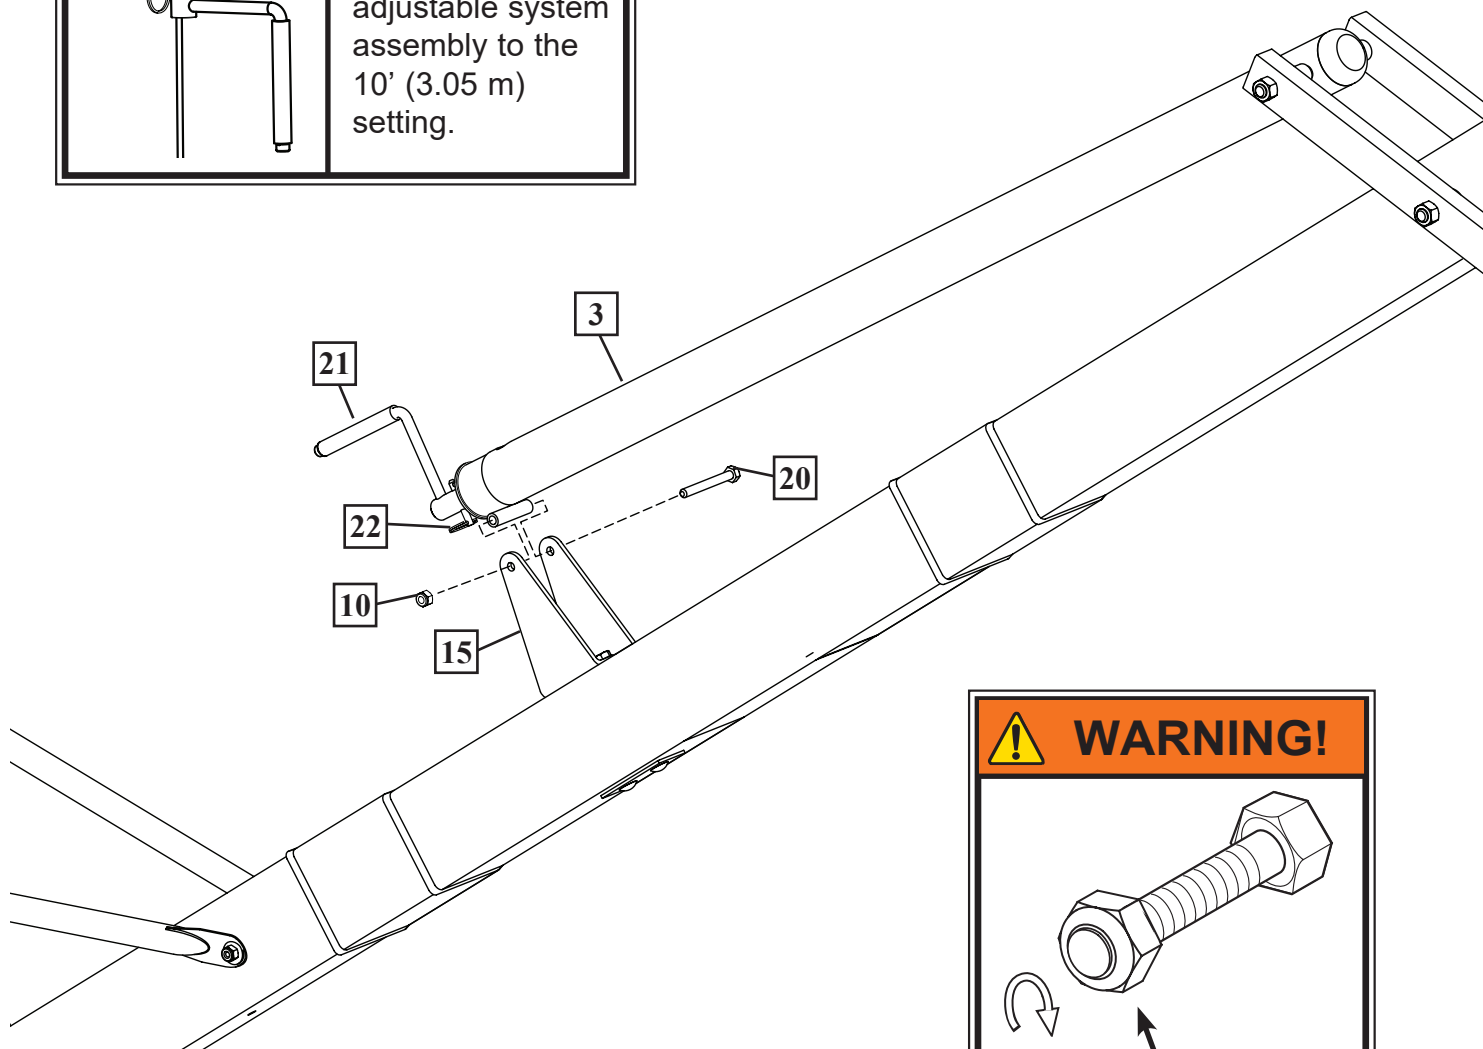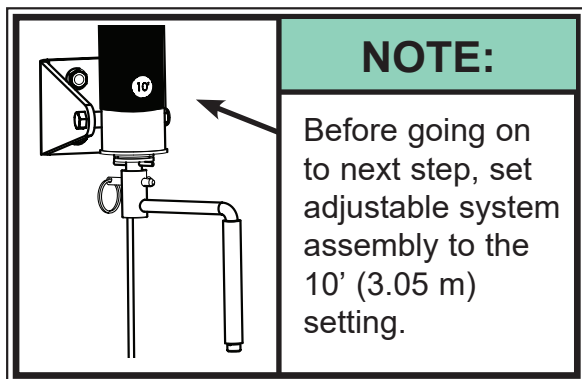


3. Roll completed assembly to desired position. Fill base with water (approx. 40 gallons (128 Liters)) or sand (approx. 475 lbs. (216 kg)) and rotate the cap (41) into base (1).

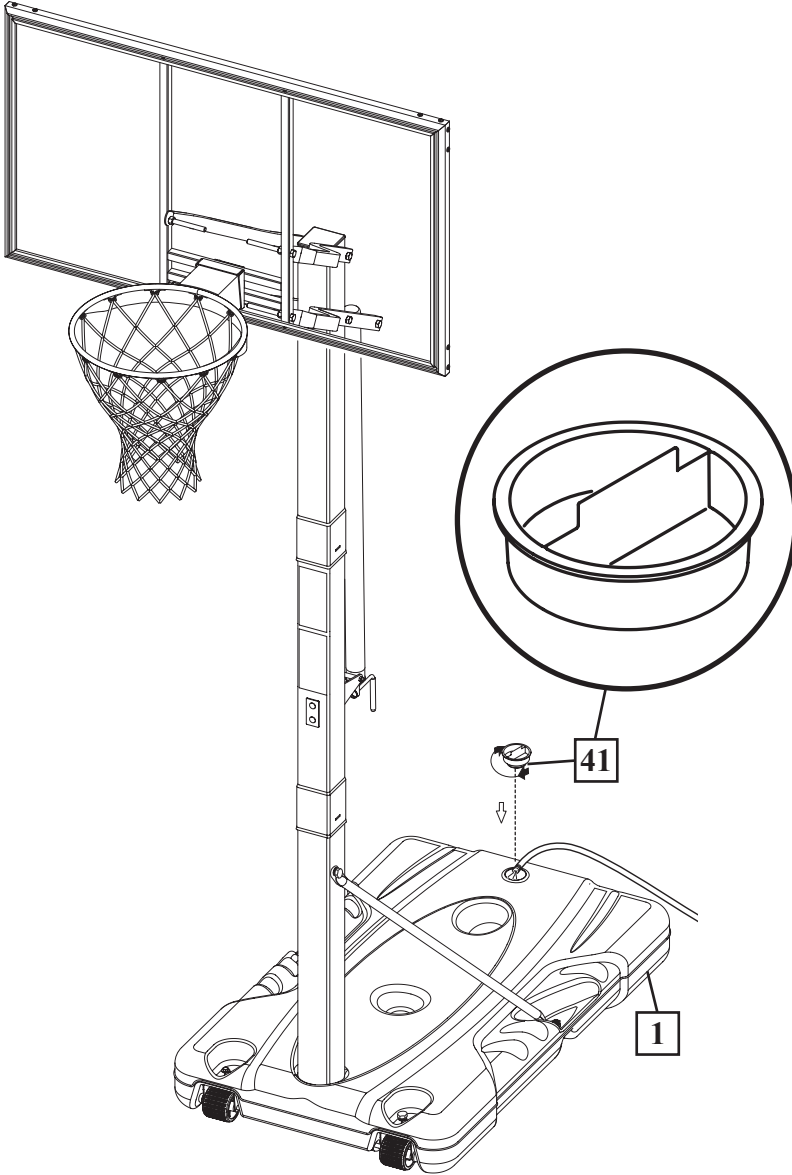


WARNING!	
	TWO CAPABLE ADULTS REQUIRED FOR THIS PROCEDURE. FAILURE TO FOLLOW THIS WARNING COULD RESULT IN SERIOUS INJURY AND/OR PROPERTY DAMAGE.
	DO NOT LEAVE ASSEMBLY UNATTENDED WHEN EMPTY; IT MAY TIP OVER.
CAUTION!	
	ADD TWO GALLONS (7.6 LITERS) OF NON-TOXIC ANTIFREEZE IN SUB-FREEZING CLIMATES.
	<i>IF USING SAND:</i> 2 GALLONS OF ANTI-FREEZE IS <u>NOT</u> REQUIRED.

WARNING!	
	CAP (41) MUST BE TIGHTENED COMPLETELY AND SECURELY TO PREVENT LEAKAGE. CHECK WATER LEVEL BEFORE EACH USE! FAILURE TO FOLLOW THIS WARNING COULD RESULT IN SERIOUS INJURY AND/OR PROPERTY DAMAGE.



4. Wrap pole pad (27) around the lower pole area and secure in place with velcro straps.

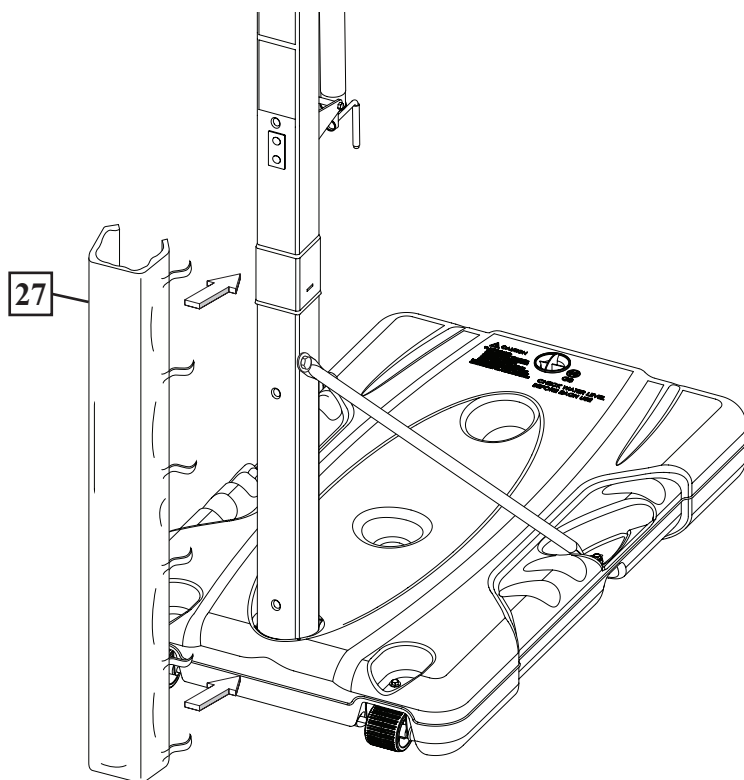

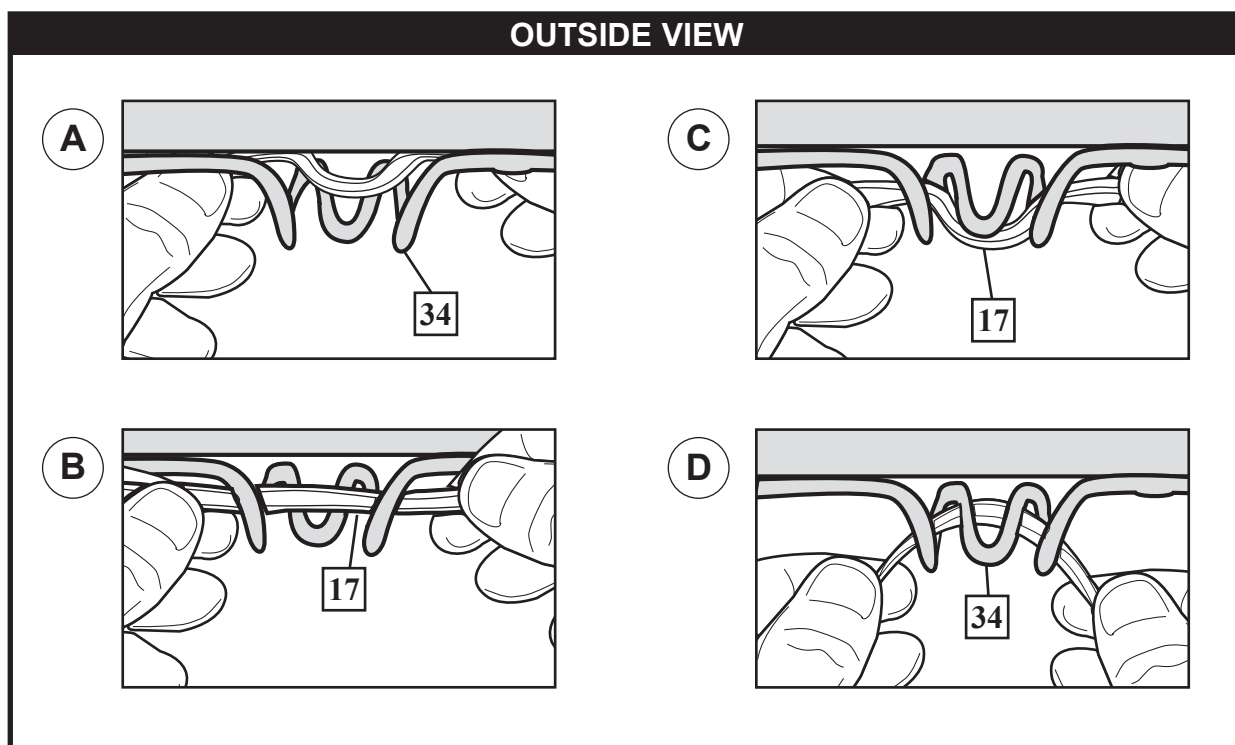



5. Install net (17).

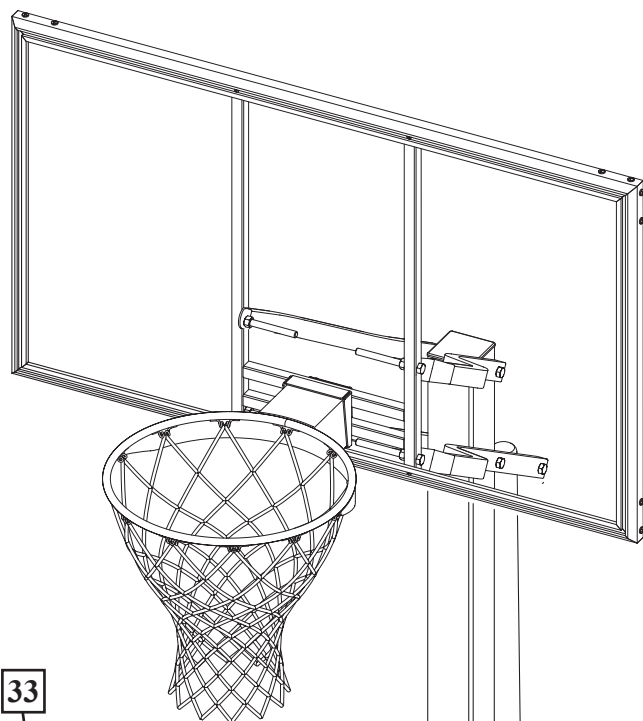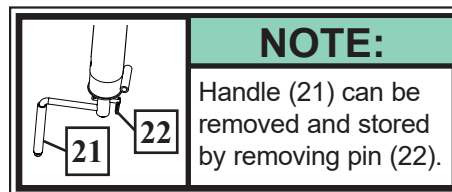

6. Apply Height Adjustment and Moving Label (33) to front of pole, where it is clearly visible.

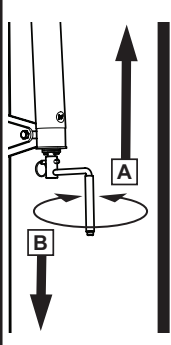


	<p>CAUTION!</p>		
	<p>DO NOT OVER-CRANK HANDLE BEYOND THE MANUFACTURED HEIGHT-INDICATOR RANGE OF 7-1/2 - 10 FEET. DAMAGE MAY BE CAUSED TO THE SCREW JACK'S INTERNAL ADJUSTMENT MECHANISM IF ADJUSTED OVER 10 OR UNDER 7-1/2 FEET.</p>		
<div style="text-align: center;">  </div>			<p>HEIGHT AND MOVING LABEL MUST NOT OBSTRUCT FACTORY ATTACHED WARNING LABEL.</p>

33

HEIGHT ADJUSTMENT


Rotate crank handle to raise and lower backboard.

Do not over crank handle beyond the manufactured height indicator range of 7-1/2 - 10 feet. Damage may be caused to the screw jack's internal adjustment mechanism if adjusted over 10 or under 7-1/2 feet.




MOVING SYSTEM

1. While holding pole, rotate basketball system forward until wheels engage with ground.
2. Move basketball system to desired location.
3. Carefully rotate basketball system upright.
4. Check system for stability.




568090 11/06

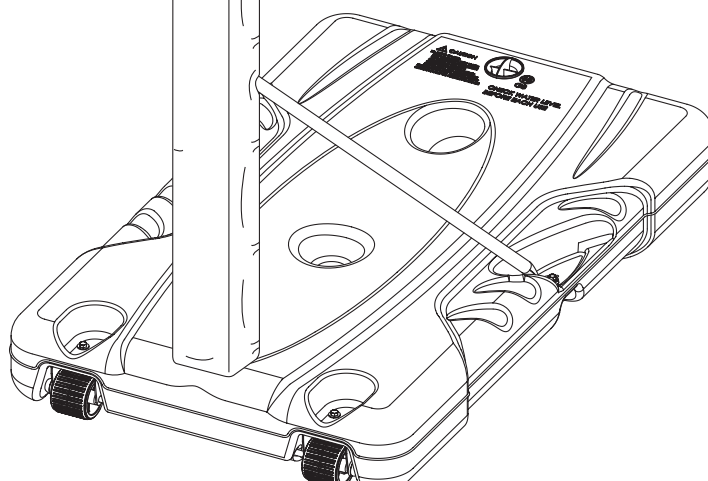


SECTION C: BOARD PAD

TOOLS REQUIRED FOR THIS SECTION

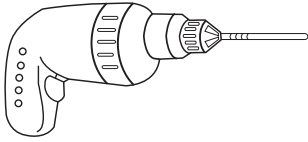


Or

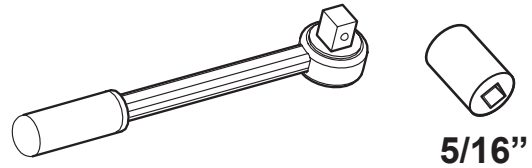

Portable Drill with Torque Adjustment


Socket Wrenches and Sockets




Phillips Screwdriver

KIT #5


ATTACH THE BOARD PAD - HARDWARE IDENTIFIER - KIT #5

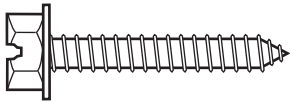

#53 (2)




#56 (8)




#54 (8)




#57 (8)

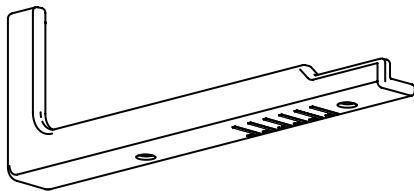

#50 (1)

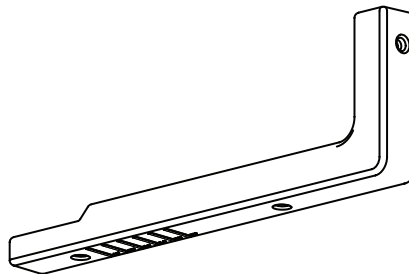

#51 (1)

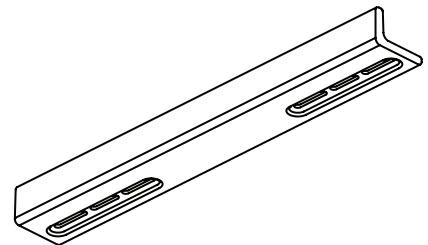

#52 (1)



#55 (1)

PARTS LIST - KIT #5

Item Qty. Part No. Description

50	1	600306	Board Pad, Left Section
51	1	600307	Board Pad, Right Section
52	1	600308	Board Pad, Center Section
55	1	205355	Drill Bit 11/64"

Item Qty. Part No. Description



			KIT #5
53	2	201596	Screw, 1/4 x 1.25
54	8	206303	Washer, Flat
56	8	202871	Screw, 1/4 x .75
57	8	202219	Protector, 1/4", Gray

BOARD PAD - INSTALLATION

1.

Use an 11/64 drill bit (55) to pre-drill holes on backboard (**Figure A**). A center punch is recommended to mark hole locations.



Using the drilled holes, attach left and right board pad sections (50 and 51) using screws (56) and washers (54) as shown.

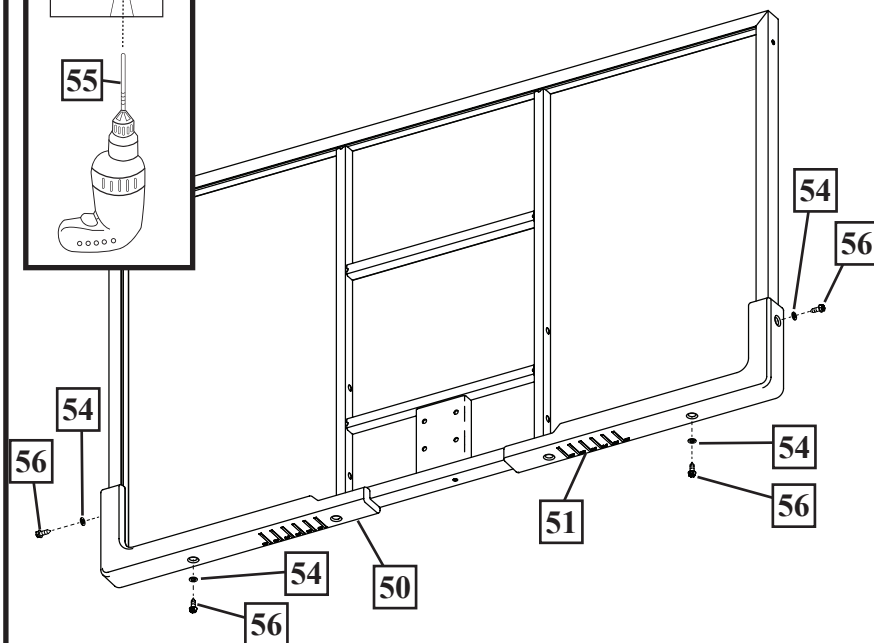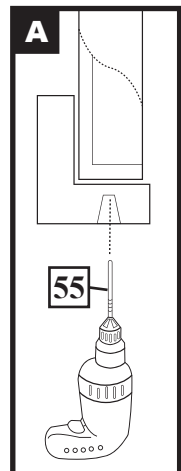

2.

Center middle pad (52) between left and right pads (50 and 51) using hash marks (SEE DETAIL) for given board size. Slots in middle pad should align with holes in left and right pad.


A.

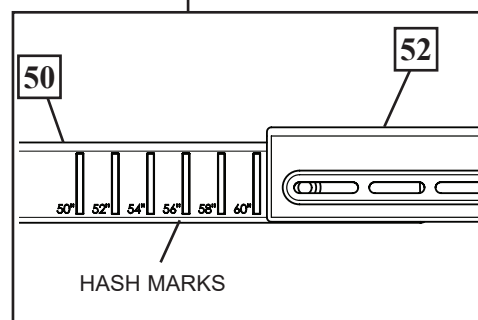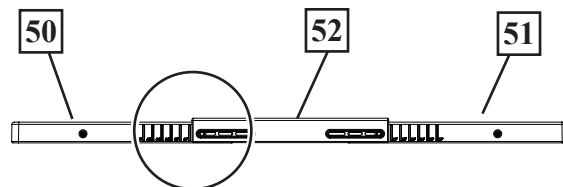

BOTTOM VIEW

B.

Attach middle pad (3) using screws (53) and washers (54) as shown.

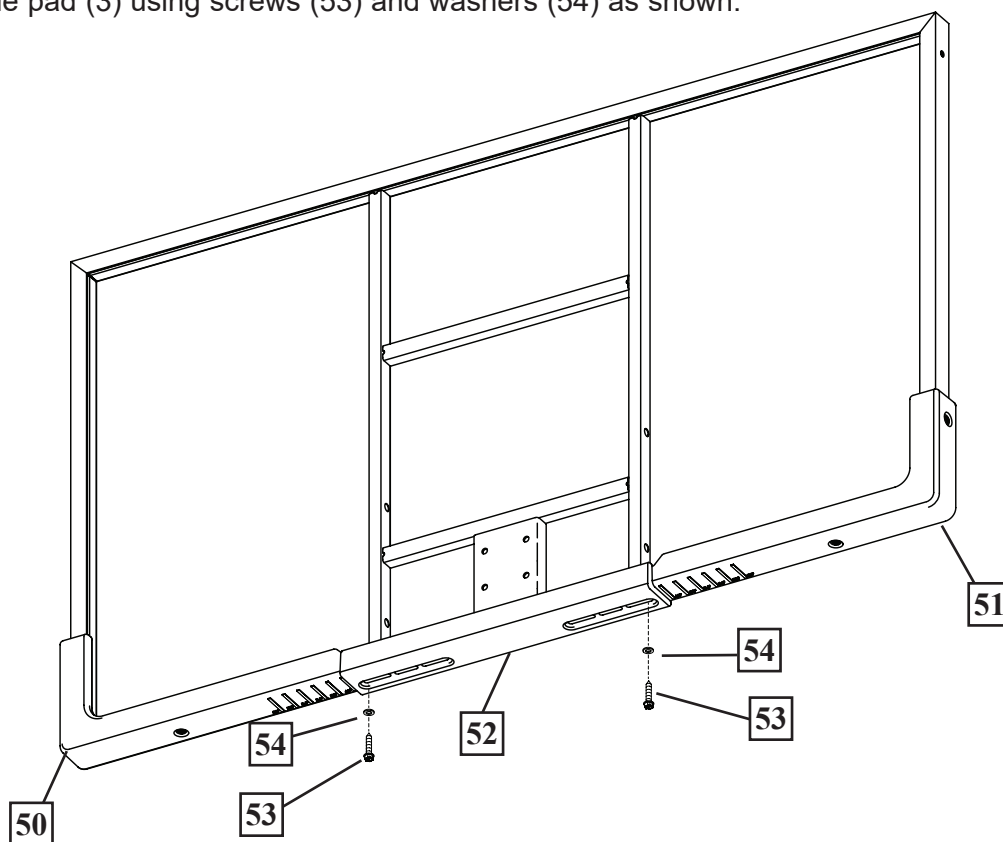

**APPLY HEIGHT INDICATOR DECALS
FIXEZ LES ETIQUETTES AUTOCOLLANTES DU REPERE DE HAUTEUR
HÖHENANZEIGER-AUFKLEBER ANBRINGEN
APLIQUE LAS CALCOMANÍAS DEL INDICADOR DE ALTURA**

1.

Apply Height Indicator Labels) to screw jack using a tape measure. Tools needed for this operation - Tape measure, Step Ladder 8 ft..

Appliquer les Etiquettes d'Indicateur de Hauteur visser la prise qui utilise un mètre. Les outils ont eu besoin de pour cette opération - le mètre, Echelle d'Etape 8 pied.

Verwenden Sie Höhenanzeigeretikette, Wagenheber zu schrauben, der ein Messband benutzt. Werkzeuge haben für diesen Betrieb - Messband, Schritt Leiter 8 Füße gebraucht.

Aplique Altura Etiquetas de Indicador enroscar gato que utiliza una medida de cinta. Las herramientas necesitaron para esta operación - la medida de Cinta, la Escalera 8 Pies.

A

Step 1 - Set unit to 7-1/2 feet (2.3 m) by adjusting the screw jack and measuring from the top of the rim to the playing surface. Place 7-1/2' (2.3 m) sticker in the middle of the hole of the screw jack cover as shown.

Marcher 1 - L'unité fixe à 7-1/2 pieds (2,3 m) en ajustant la prise de vis et mesurant du sommet du bord à la surface jouant. Placer 7-1/2' (2,3 m) l'autocollant au milieu du trou de la couverture de prise de vis comme indiqué.

Schreiten Sie 1 - Feste Einheit zu 7-1/2 Füßen (2,3 m) durch Einstellen des Schraubenwagenhebers und messend vom Oberteil des Rands zum spielenden auftaucht. Stellen Sie 7-1/2' (2,3 m) Aufkleber in der Mitte des Lochs der Schraubenwagenhebersdecke wie gezeigt.

El paso 1 - La unidad fija a pies 7-1/2 (2,3 M) ajustando el gato de tornillo y midiendo de la cima del borde a la superficie que juega. Coloque 7-1/2' (2,3 M) pegatina en medio del hoyo de la cobertura de gato de tornillo como mostrado.

B

Step two - Using a tape measure, set unit to 7 1/2 feet (2,3m) by adjusting the screw-jack and measuring from the top of the rim to the playing surface. Place the 7-1/2 foot (2,3m) sticker in the middle of the hole of the screw-jack cover as shown.

Marcher deux - Utiliser un mètre, une unité fixe à 7 1/2 pieds (2,3m) en ajustant la vis-prise et mesurant du sommet du bord à la surface jouant. Placer le 7-1/2 pied (2,3m) l'autocollant au milieu du trou de la couverture de vis-prise comme indiqué.

Schreiten Sie zwei - Benutzen eines Messbands, fester Einheit zu 7 1/2 Füße (2,3m) durch Einstellen des Schraube-wagenheber und messend vom Oberteil des Rands zum spielenden auftaucht. Stellen Sie den 7-1/2 Fuß (2,3m) Aufkleber in der Mitte des Lochs der Schraube-wagenheberdecke wie gezeigt.

El paso dos - Utilizando una medida de cinta, unidad fija a 7 1/2 pies (2,3m) ajustando el tornillo-gato y midiendo de la cima del borde a la superficie que juega. Coloque el pie 7-1/2 (2,3m) pegatina en medio del hoyo de la cobertura de tornillo-gato como mostrado.

C

Step three - Repeat step two for each subsequent height until the last sticker is in place at the 10 foot (3,04m) height.

Marcher trois - Répéter l'étape deux pour chaque hauteur subséquente jusqu'à ce que le dernier autocollant est à sa place au 10 pied (3,04m) la hauteur.

Schreiten Sie drei - Wiederholung schreitet zwei für jede folgende Höhe, bis der letzte Aufkleber an der richtigen Stelle am 10 Fuß (3,04m) Höhe ist.

El paso tres - Repite paso dos para cada altura subsiguiente hasta que la última pegatina esté en el lugar en el 10 pie (3,04m) altura.



**WARNING
AVERTISSEMENT!
WARNUNG!
¡ADVERTENCIA!**



TWO CAPABLE ADULTS REQUIRED FOR THIS PROCEDURE. FAILURE TO FOLLOW THIS WARNING COULD RESULT IN SERIOUS INJURY AND/OR PROPERTY DAMAGE.

DEUX ADULTES CAPABLES REQUIS POUR CETTE PROCÉDURE. SUIVEZ CET AVERTISSEMENT SOUS PEINE D'ENCOURIR DES BLESSURES GRAVES ET/OU DES DÉGÂTS MATÉRIELS.

DIESER VERFAHRENSSCHRITT MUSS VON ZWEI DAZU IN DER LAGE BEFINDLICHEN PERSONEN AUSGEFÜHRT WERDEN. EIN MISSACHTEN DIESER WARNUNG KANN ZU SCHWEREN VERLETZUNGEN UND/ODER SACHSCHÄDEN FÜHREN.

SE REQUIEREN DOS ADULTOS CAPACES PARA REALIZARESTEPROCEDIMIENTO. SINO SE OBSERVA ESTA ADVERTENCIA SE PODRÍA OCASIONAR UNA LESIÓN GRAVE Y/O DA—OS A LA PROPIEDAD.

